

TimberIN
Hot Tubs & Outdoor Saunas

TimberIN Nordic Cube™

Modern outdoor sauna in solid CLT

TECHNICAL DATA SHEET

SIZES	FINISHES	HEATER
S · M · L	Base · Premium	Harvia, included

THE RANGE

Three sizes. Two finishes.

Delivered flat-packed in one crate. Two to four people assemble it on site in 40–120 minutes with basic hand tools.



Nordic Cube S



Nordic Cube M



Nordic Cube L

	Nordic Cube S	Nordic Cube M	Nordic Cube L
External size (W × D × H)	1.30 × 1.60 × 2.00 m	2.00 × 1.60 × 2.00 m	2.50 × 1.60 × 2.00 m
Bathers	up to 2	up to 4	up to 6
Floor area	2.08 m²	3.20 m²	4.00 m²
Weight Base / Premium	368 / 394 kg	463 / 520 kg	570 / 622 kg
Crate Base (L × W × H)	1582 × 2020 × 580 mm	2130 × 2020 × 580 mm	2580 × 2020 × 555 mm
Crate Premium (L × W × H)	1612 × 2046 × 590 mm	2130 × 2046 × 590 mm	2580 × 2046 × 562 mm

Height is stated without the support feet; add 50 mm for the installed height. Weights are shipping weights including the crate.

TWO FINISHES

The difference is inside.





BASE

- Micro-CLT structural wall, floor and roof panels
- Stainless steel pegs, bolts and fixings
- 8 mm toughened safety glass
- Wooden-frame door and window
- Flat, weather-resistant roof system
- Double-coated lazure exterior finish
- Solid aspen bench seating
- Under-seat LED strip lighting

PREMIUM

- Everything in Base, plus:
- Full thermo-aspen interior cladding
- Thermo-aspen bench seating
- Thermo-aspen finished vents
- Softer heat, deeper tone, refined detail

CERTIFIED MATERIALS

CLT PANELS	GLAZING	ROOF	FINISHES
Cross-laminated spruce (SWP)	8 mm toughened safety glass	Liquid-applied membrane	Scandinavian wood finishes
EN 13986 · E1 formaldehyde class	EN 12150-2 · 200 K thermal shock	EN 1504-2 · fully sealed	M1 emission class

HEATER INCLUDED

Choose your Harvia heater.

Every TimberIN Nordic Cube™ is supplied with a Harvia electric sauna heater. Choose one of two models when you order; the cabin arrives with the cable entry pre-cut.

Harvia The Wall SW90

9.0 kW · steel · wall-mounted

Harvia Cilindro PC66

6.6 kW · black steel · cylindrical

Your TimberIN advisor confirms the right heater for the size you choose. Electrical connection must be carried out by a certified electrician.

DELIVERY & ASSEMBLY

From crate to first heat.

- Supplied flat-packed in a single wooden crate.
- Panels are carried by hand, so a standard side gate is no obstacle.
- Assembly by 2–4 people in 40–120 minutes with basic hand tools.
- A full TimberIN assembly manual is included.
- Fully assembled installation is available on request.
- Place the sauna on a level, load-bearing base (paving slabs, footings or a slab).




ADDITIONAL INFORMATION

The following pages add current TimberIN information (data as of 11/2026) to the original technical sheet on the previous pages. If a detail differs, please ask us; the approved order drawing applies.

In this section

NORDIC CUBE S 6
NORDIC CUBE M 7
NORDIC CUBE L 8
DELIVERY 9
BASE 10

NORDIC CUBE S

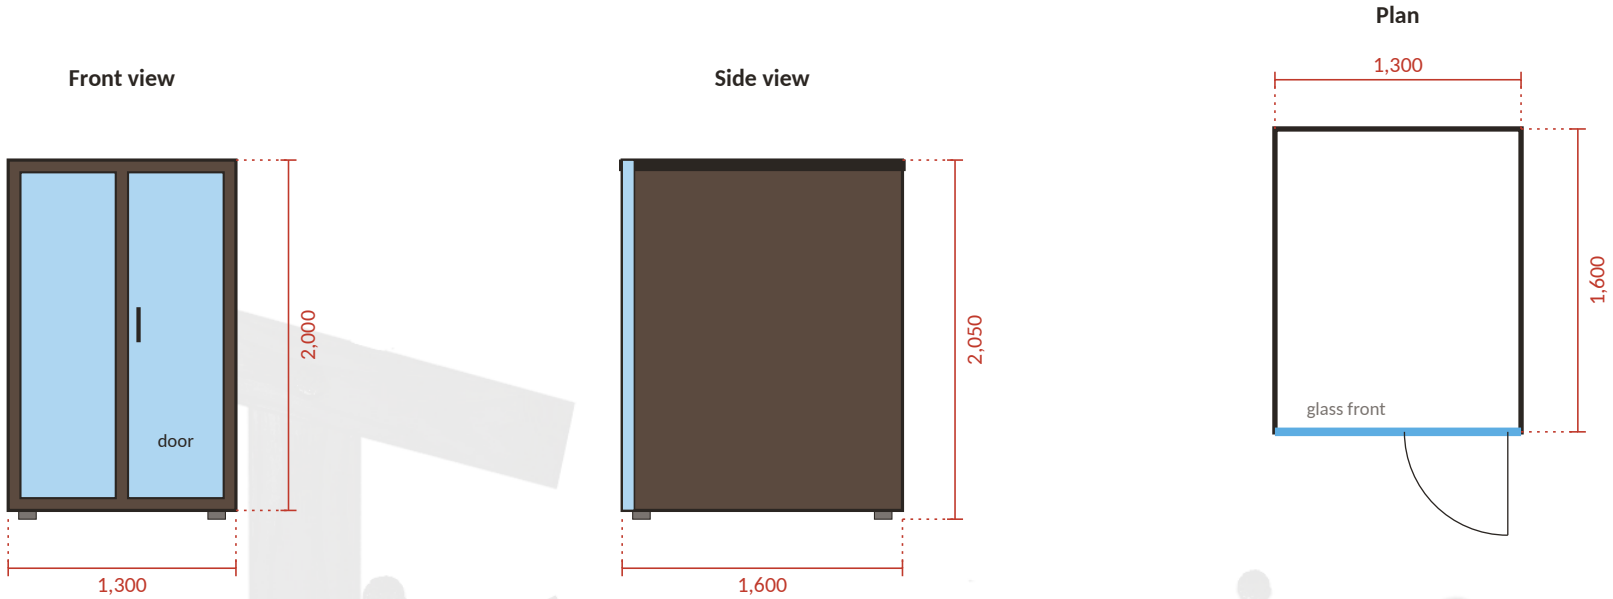


Outside size (W × D × H)	1.30 × 1.60 × 2.00 m
Installed height	about 2,050 mm with the support feet
Bathers	up to 2 people
Floor area	2.08 m²
Front	Full-height window and glass door, 8 mm toughened safety glass, wooden frames
Finish	Base (solid aspen benches) or Premium (thermo-aspen interior)
Heater	One Harvia electric heater included: The Wall SW90 (9 kW) or Cilindro PC66 (6.6 kW)
Exterior	Double-coated lazure; dark lazure shown in the photos; ask us about other lazure shades

Included: solid micro-CLT walls, floor and roof with stainless steel pegs, bolts and fixings; full-height window and glass door; flat sealed roof; benches; under-seat LED strip lighting; one Harvia electric heater; the TimberIN assembly manual.


Schematic drawing, not to scale. Dimensions in mm, approximate; the approved order documents apply.

NORDIC CUBE M


Front view

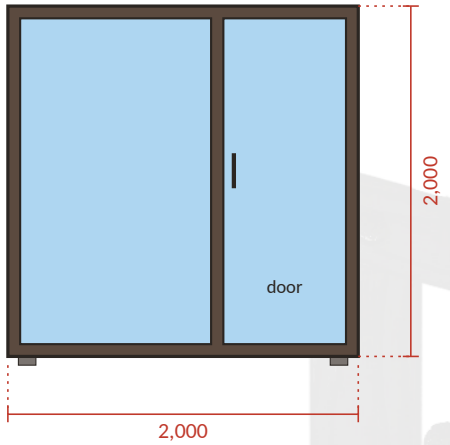

Side view

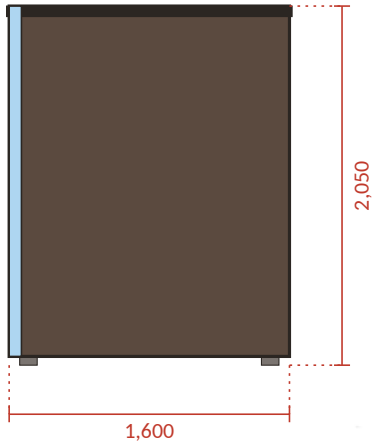

Plan

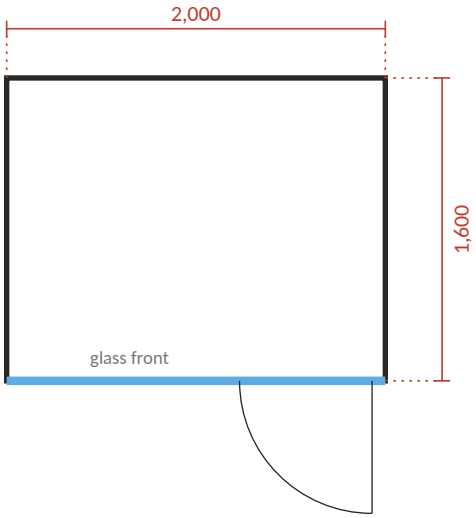


Outside size (W × D × H)	2.00 × 1.60 × 2.00 m
Installed height	about 2,050 mm with the support feet
Bathers	up to 4 people
Floor area	3.20 m²
Front	Full-height window and glass door, 8 mm toughened safety glass, wooden frames
Finish	Base (solid aspen benches) or Premium (thermo-aspen interior)
Heater	One Harvia electric heater included: The Wall SW90 (9 kW) or Cilindro PC66 (6.6 kW)
Exterior	Double-coated lazure; dark lazure shown in the photos; ask us about other lazure shades

Included: solid micro-CLT walls, floor and roof with stainless steel pegs, bolts and fixings; full-height window and glass door; flat sealed roof; benches; under-seat LED strip lighting; one Harvia electric heater; the TimberIN assembly manual.


Schematic drawing, not to scale. Dimensions in mm, approximate; the approved order documents apply.

NORDIC CUBE L


Front view

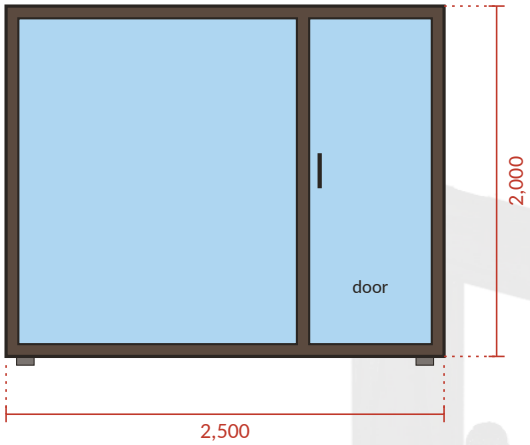

Side view

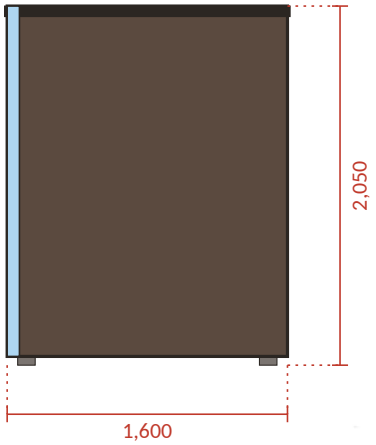

Plan

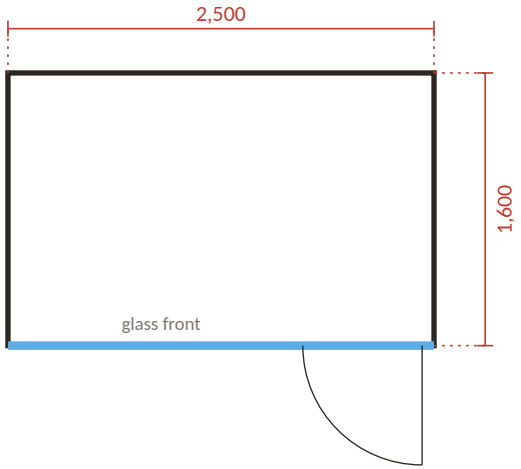

Outside size (W × D × H)	2.50 × 1.60 × 2.00 m
Installed height	about 2,050 mm with the support feet
Bathers	up to 6 people
Floor area	4.00 m²
Front	Full-height window and glass door, 8 mm toughened safety glass, wooden frames
Finish	Base (solid aspen benches) or Premium (thermo-aspen interior)
Heater	One Harvia electric heater included: The Wall SW90 (9 kW) or Cilindro PC66 (6.6 kW)
Exterior	Double-coated lazure; dark lazure shown in the photos; ask us about other lazure shades

Included: solid micro-CLT walls, floor and roof with stainless steel pegs, bolts and fixings; full-height window and glass door; flat sealed roof; benches; under-seat LED strip lighting; one Harvia electric heater; the TimberIN assembly manual.

Schematic drawing, not to scale. Dimensions in mm, approximate; the approved order documents apply.


DELIVERY

1 · Flat-packed kit in one crate

The panels arrive in one wooden crate and are carried by hand, so a standard side gate is no obstacle. Two to four people assemble the sauna in 40–120 minutes with basic hand tools, following the TimberIN assembly manual.

Crate (L × W × H)	Base	Premium
S	1,582 × 2,020 × 580 mm	1,612 × 2,046 × 590 mm
M	2,130 × 2,020 × 580 mm	2,130 × 2,046 × 590 mm
L	2,580 × 2,020 × 555 mm	2,580 × 2,046 × 562 mm

crate L · Premium · H 590 mm

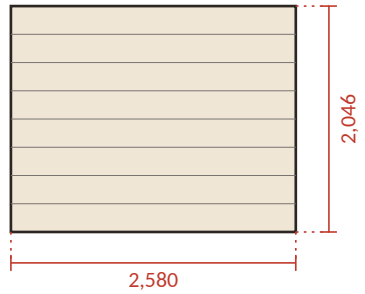

2 · Pre-assembled

Also available: the sauna arrives fully assembled. Unloading machinery (crane or forklift) and clear access to the base are required on site.


Both delivery types are quoted from your postcode. Check gates, turns and overhead clearance on the route to the base.

Schematic drawing, not to scale. Dimensions in mm, approximate; the approved order documents apply.

BASE

Place the sauna on a level, load-bearing base, for example paving slabs, footings or a concrete slab. On lawn, gravel or sand, prepare and level a support structure first, and make sure the support points line up with the positions of the sauna pegs. A base that is out of level shows in every panel joint and stops the door closing evenly.

— Level in both directions
— Load-bearing and drained
— Support points under the peg positions
— Re-check the level after a period of use

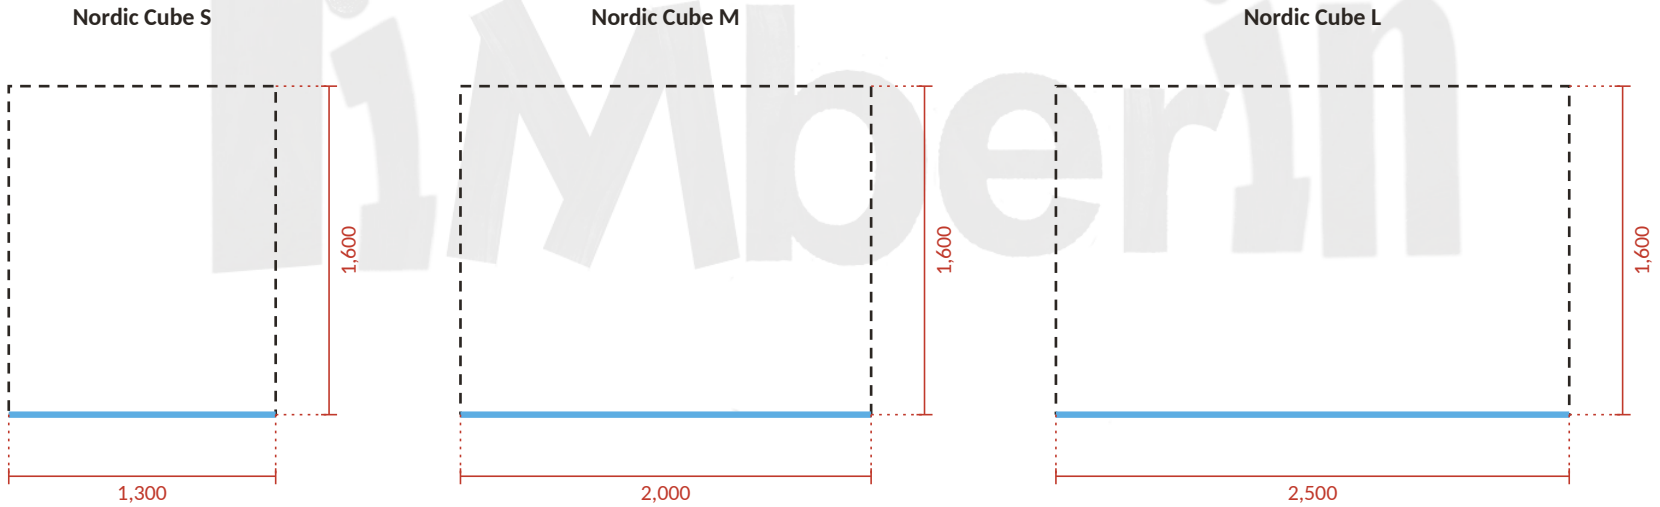

Schematic drawing, not to scale. Dimensions in mm, approximate; the approved order documents apply.