**ENG:** The measurements mentioned in the drawings and in TimberIN websites are only approximate data. They will differ from the measurements of the finished product. It is due to the fact that our products are individually designed and hand-made. However, if one or more measurements are very important, please mention before ordering. We will pay big attention to your requirements in the production process. This will ensure that the product will be produced as closely as possible to your requirements.

**DE:** Die in den Zeichnungen und auf den TimberIN-Websites genannten Maße sind nur ungefähre Angaben. Sie unterscheiden sich von den Maßen des fertigen Produkts. Dies liegt daran, dass unsere Produkte individuell gestaltet und handgefertigt werden. Wenn jedoch eine oder mehrere Messungen sehr wichtig sind, geben Sie dies bitte vor der Bestellung an. Wir werden Ihre Anforderungen im Produktionsprozess sehr berücksichtigen. Dadurch wird sichergestellt, dass das Produkt so genau wie möglich Ihren Anforderungen entspricht.

**FR:** Les mesures mentionnées dans les dessins et sur les sites Web TimberIN ne sont que des données approximatives. Ils différeront des mesures du produit fini. Cela est dû au fait que nos produits sont conçus individuellement et fabriqués à la main. Cependant, si une ou plusieurs mesures sont très importantes, merci de le mentionner avant de commander. Nous prêterons une grande attention à vos besoins dans le processus de production. Cela garantira que le produit sera fabriqué aussi près que possible de vos besoins.

**DK:** Målingerne nævnt på tegningerne og på TimberIN-websteder er kun omtrentlige data. De afviger fra målingerne af det færdige produkt. Det skyldes, at vores produkter er individuelt designet og håndlavet. Hvis en eller flere målinger dog er meget vigtige, skal du nævne det før du bestiller. Vi vil være meget opmærksomme på dine krav i produktionsprocessen. Dette vil sikre, at produktet produceres så tæt som muligt efter dine krav.

**NO:** Målingene nevnt på tegningene og på TimberIN nettsteder er bare omtrentlige data. De vil avvike fra målingene av det ferdige produktet. Det skyldes det faktum at produktene våre er individuelt designet og håndlaget. Imidlertid, hvis en eller flere målinger er veldig viktige, må du nevne før du bestiller. Vi vil ta stor vekt på dine krav i produksjonsprosessen. Dette vil sikre at produktet blir produsert så nært som mulig dine behov.

**IT:** Le misure menzionate nei disegni e nei siti Web di TimberIN sono solo dati approssimativi. Differiranno dalle misure del prodotto finito. È dovuto al fatto che i nostri prodotti sono progettati e realizzati a mano individualmente. Tuttavia, se una o più misurazioni sono molto importanti, si prega di menzionare prima di ordinare. Presteremo grande attenzione alle vostre esigenze nel processo di produzione. Ciò garantirà che il prodotto sarà prodotto il più vicino possibile alle vostre esigenze.

**NL:** De in de tekeningen en op TimberIN-websites genoemde metingen zijn slechts benaderende gegevens. Ze zullen verschillen van de afmetingen van het eindproduct. Het is te wijten aan het feit dat onze producten individueel zijn ontworpen en met de hand zijn gemaakt. Als een of meer metingen erg belangrijk zijn, vermeld dit dan voordat u bestelt. We zullen veel aandacht besteden aan uw eisen in het productieproces. Dit zorgt ervoor dat het product zo dicht mogelijk bij uw eisen wordt geproduceerd.

**SWE:** Mätningarna som nämns på ritningarna och på TimberIN-webbplatser är endast ungefärliga data. De kommer att skilja sig från måtten på den färdiga produkten. Det beror på att våra produkter är individuellt designade och handgjorda. Om en eller flera mätningar är mycket viktiga, berätta dock innan du beställer. Vi kommer att ägna stor uppmärksamhet åt dina krav i produktionsprocessen. Detta kommer att säkerställa att produkten produceras så nära dina krav som möjligt.

**PL:** Pomiary wymienione na rysunkach i na stronach internetowych TimberIN są jedynie danymi przybliżonymi. Będą się różnić od pomiarów gotowego produktu. Wynika to z faktu, że nasze produkty są indywidualnie zaprojektowane i wykonane ręcznie. Jeśli jednak co najmniej jeden pomiar jest bardzo ważny, należy o tym wspomnieć przed złożeniem zamówienia. Zwrócimy dużą uwagę na Twoje wymagania w procesie produkcyjnym. Zapewni to, że produkt będzie produkowany jak najbliżej Twoich wymagań.


# BARREL OUTDOOR GARDEN SAUNA TECHNICAL SHEET

TimberIN
BALTIC SPA & SAUNAS

## Table of contents


GENERAL INFO (⌀ 2000 SAUNA) ..... 3
GENERAL INFO (⌀ 2200 SAUNA) ..... 4
2000 MM BARREL SAUNA ..... 5
3000 MM BARREL SAUNA ..... 9
4000 MM BARREL SAUNA ..... 14
5000 MM BARREL SAUNA ..... 19
WOOD BURNING HARVIA HEATERS ..... 24
WOOD BURNING HARVIA HEATER SAFETY DISTANCES APPLIED IN TIMBERIN SAUNAS ..... 25
ELECTRIC HARVIA HEATERS ..... 26
THERMAL INSULATION ..... 27
PANORAMIC WINDOW TYPES ..... 28
STANDARD WINDOW ..... 28
HALF PANORAMIC WINDOW ..... 29
FULL PANORAMIC WINDOW ..... 30


# GENERAL INFO (⌀ 2000 SAUNA)

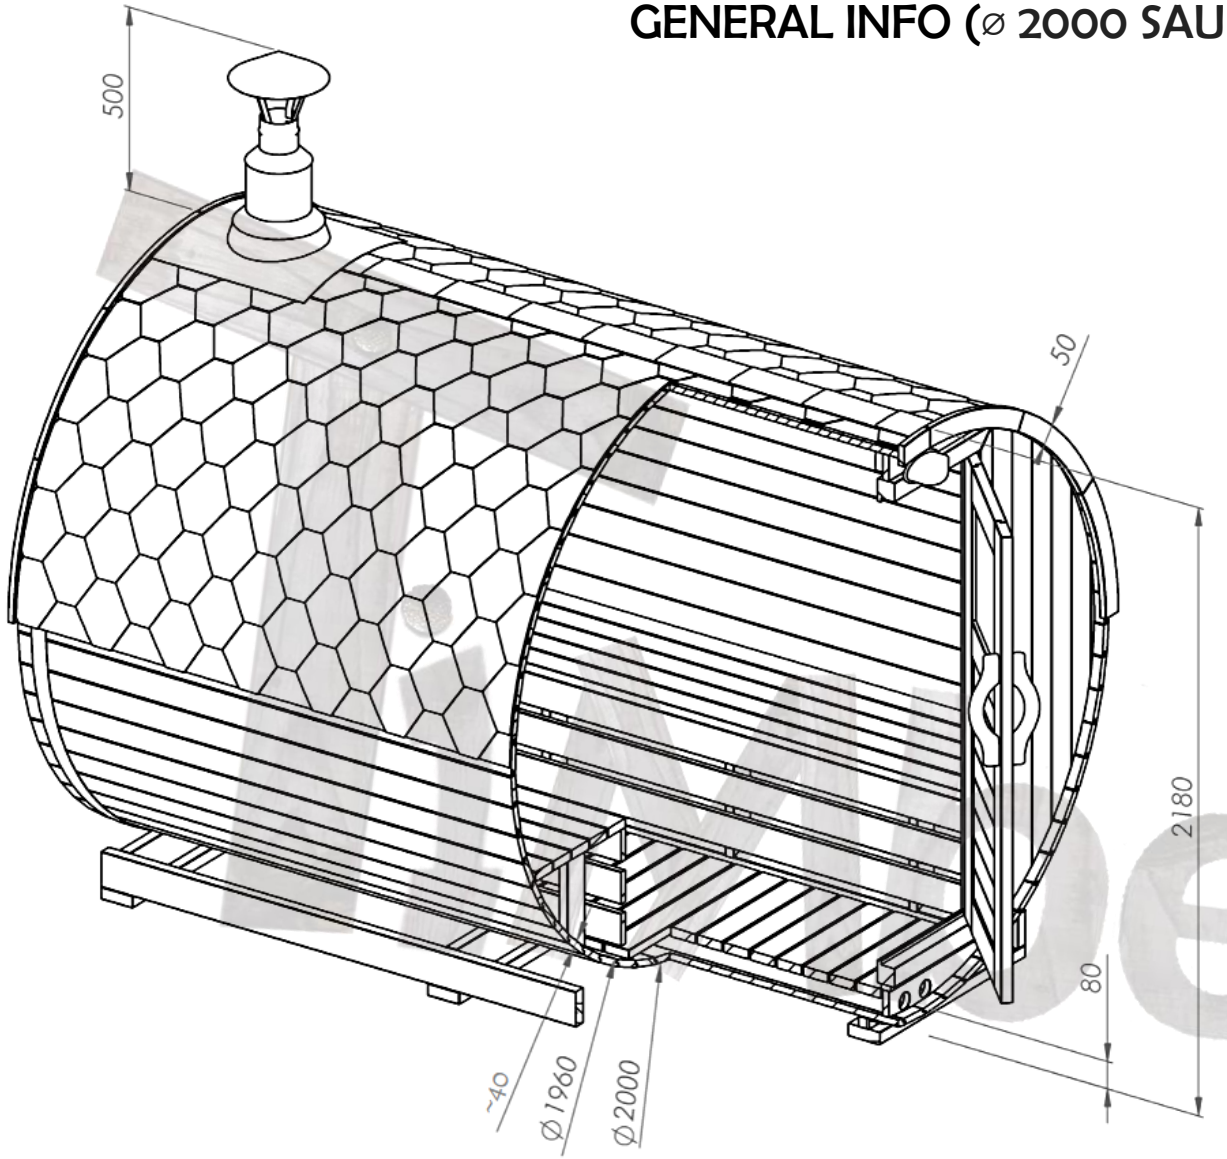



| MODEL | GENERAL MEASUREMENTS |
|---|---|
| | |
| Inside diameter | 1960 mm |
| Outside diameter | 2000 mm |
| | |
| Height of the barrel | 2180 mm |
| Height of the chimney | 500 mm |
| Total height | 2680 mm |
| | |

3D view of this model

# GENERAL INFO (⌀ 2200 SAUNA)

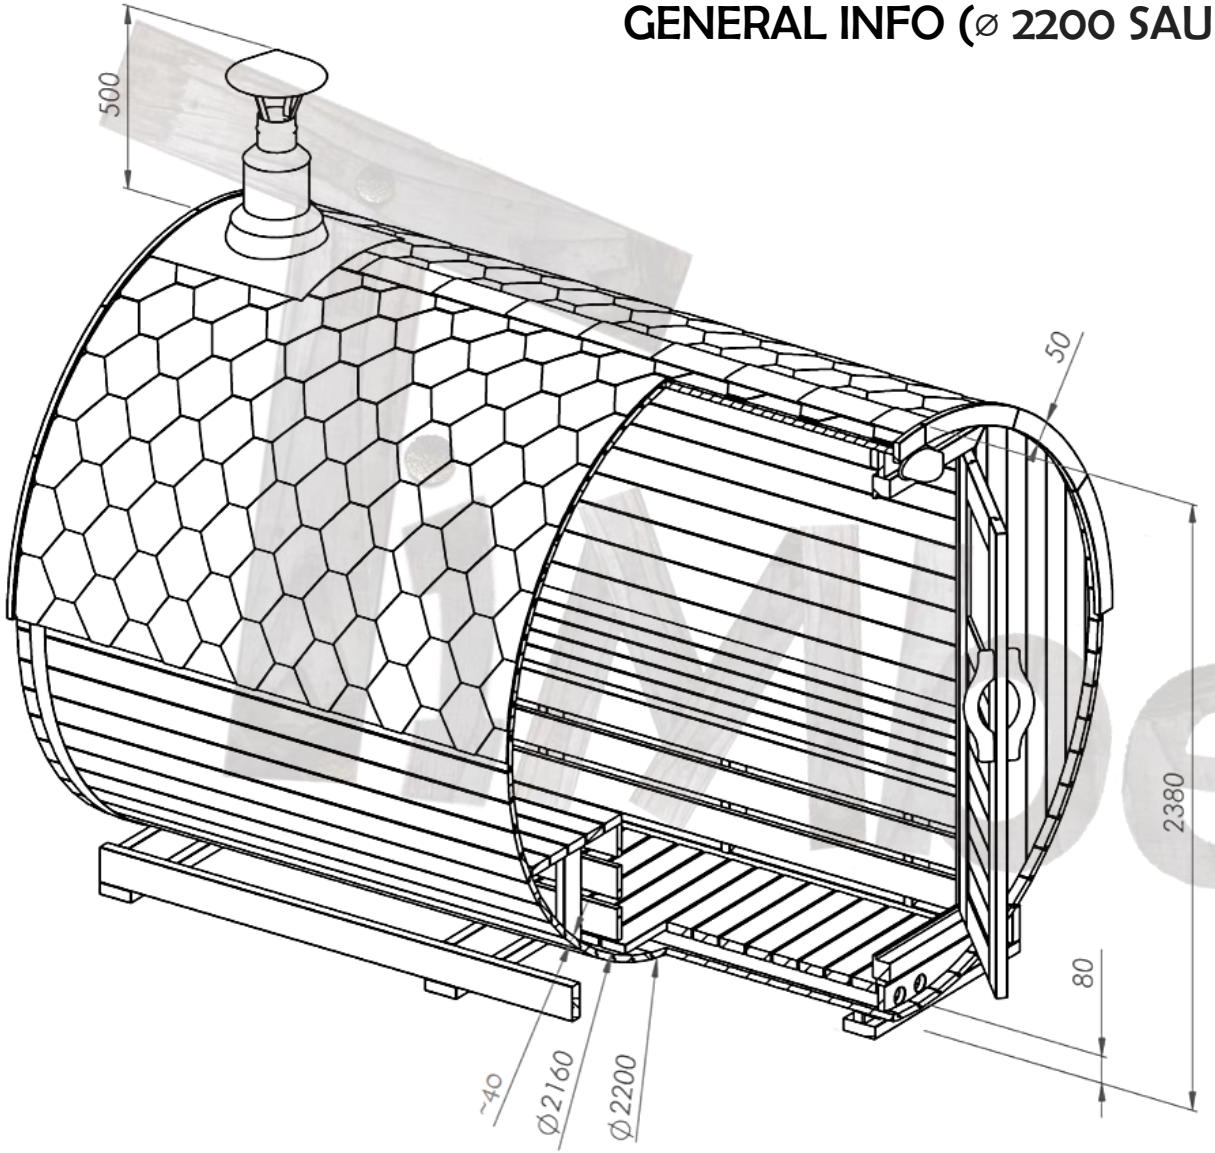



| MODEL | GENERAL MEASUREMENTS |
|---|---|
| | |
| Inside diameter | 2160 mm |
| Outside diameter | 2200 mm |
| | |
| Height of the barrel | 2380 mm |
| Height of the chimney | 500 mm |
| Total height | 2880 mm |
| | |

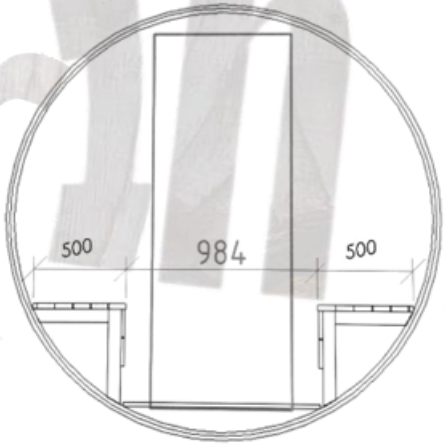


3D view of this model


# 2000 MM BARREL SAUNA

TimberIN
BALTIC SPA & SAUNAS

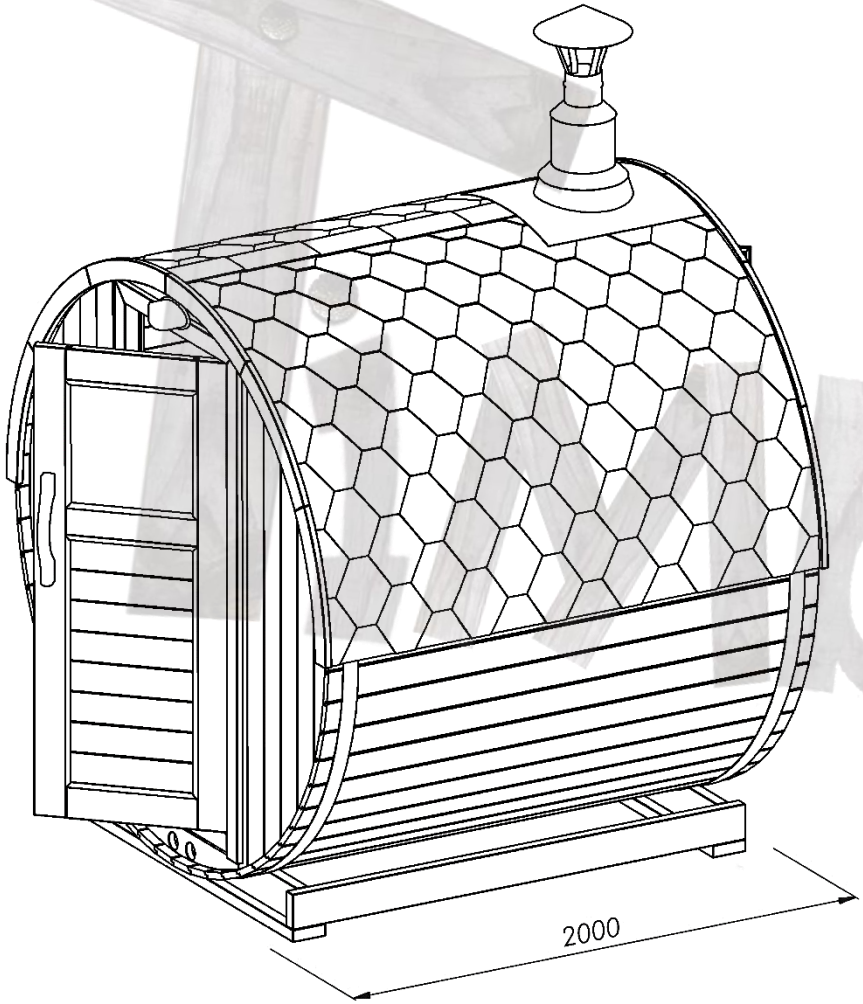


| MODEL | 2000 MM BARREL |
|---|---|
| | |
| **Seating capacity** | 2 - 4 |
| | |
| **Length** | 2000 mm |
| **Diameter** | 2000 or 2200 mm |
| **Weight** | ~800 kg |
| | |
| **Wood type** | Spruce<br>Larch<br>Thermowood |
| | |
| **Recommended official “Harvia” heater** | Harvia M3<br>Harvia M3 SL<br>Harvia Cilindro 9 kW |
| | |


# INTERIOR LAYOUT

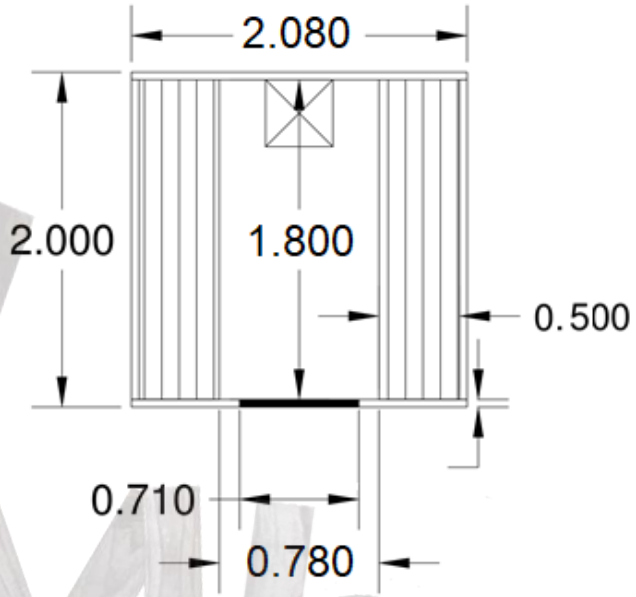


| MODEL – BARREL | INTERIOR LAYOUT of not insulated sauna |
|---|---|
| | |
| **Length outside** | 2000 mm |
| **Length inside** | 1800 mm |
| **Width outside** | 2080mm |
| | |
| | |
| **Door width** | 710 mm |
| **Width of the benches** | 500 mm |
| | |

TiMberin


# BASE MEASUREMENTS

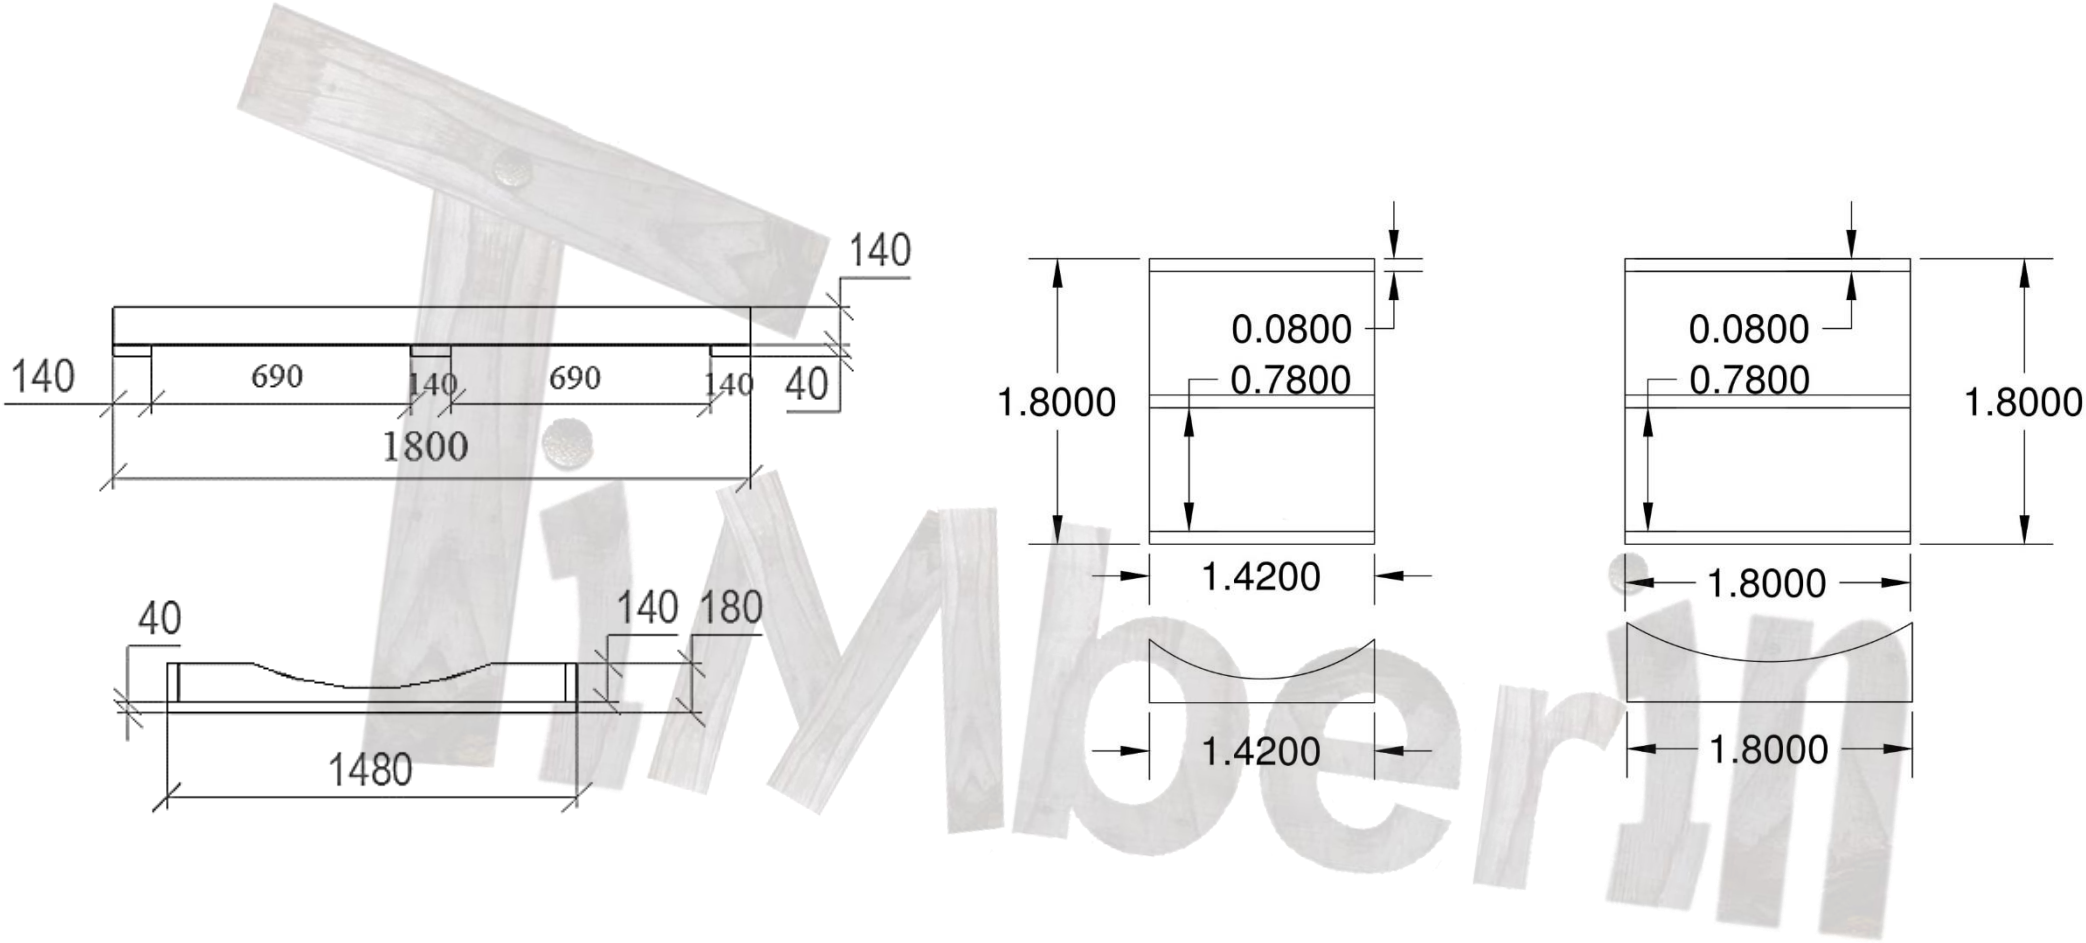



Please note that the base of the sauna may differ depending on the type of construction.

If that makes any influence on your order, please contact us separately and we will give all required information

# DELIVERY INFO

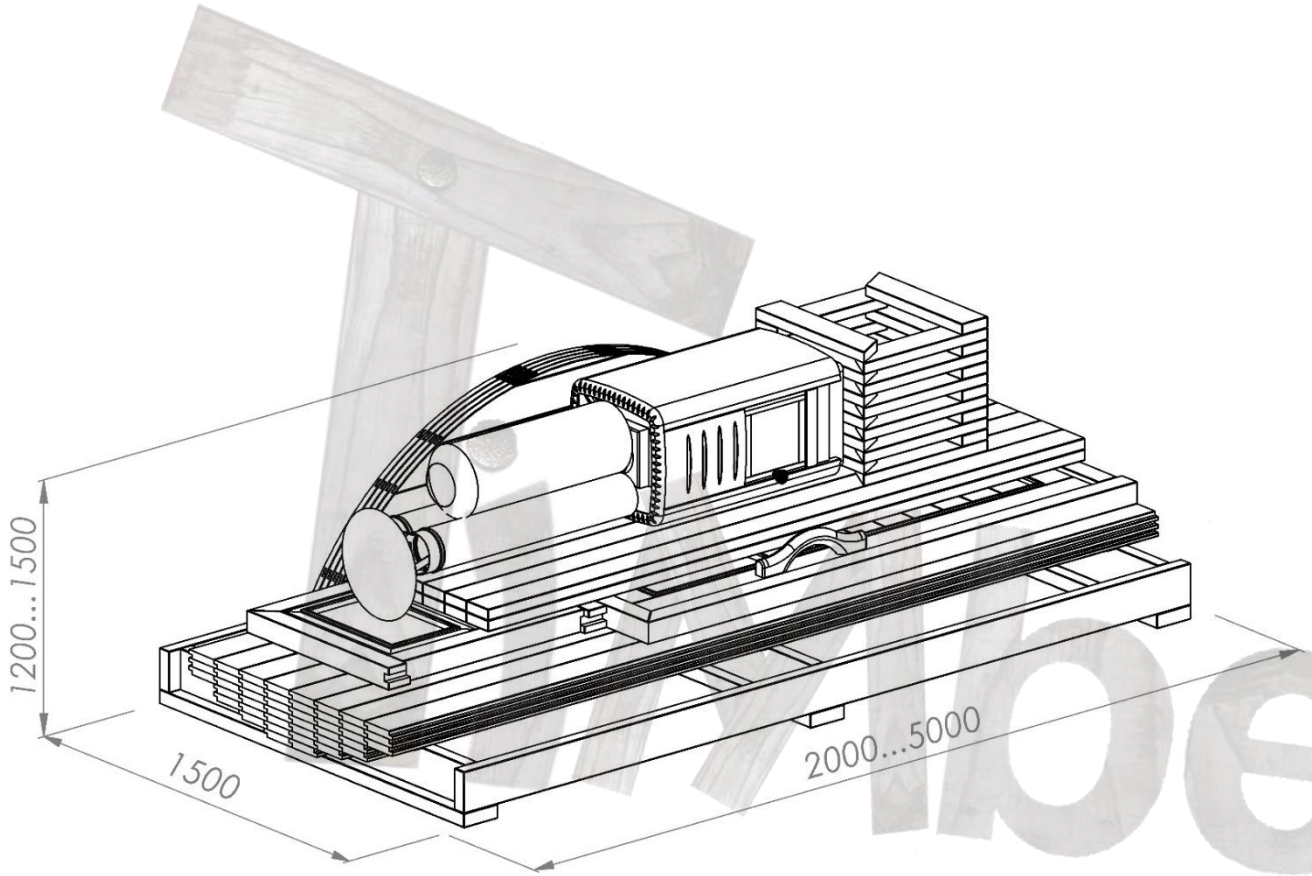



| MODEL 2000 MM BARREL | DELIVERY INFO |
|---|---|
| | |
| **Assembly kit (flat packed) sauna measurements** | Height: 1200 - 1500 mm<br>Width: 1500 mm<br>Length: 2000 mm<br><br>Weight ~800 kg |
| **Assembled sauna measurements** | Height: 2000-2200 mm<br>Width: 2000-2200 mm<br>Length: 2000 mm<br><br>Weight ~800 kg |
| | |

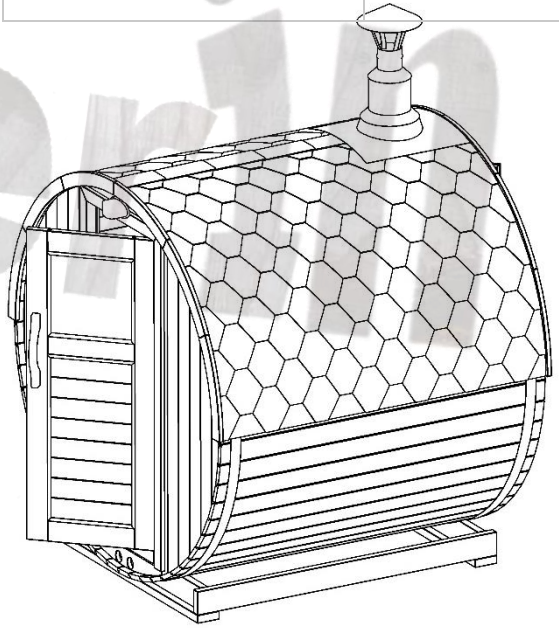

finlberin


# 3000 MM BARREL SAUNA

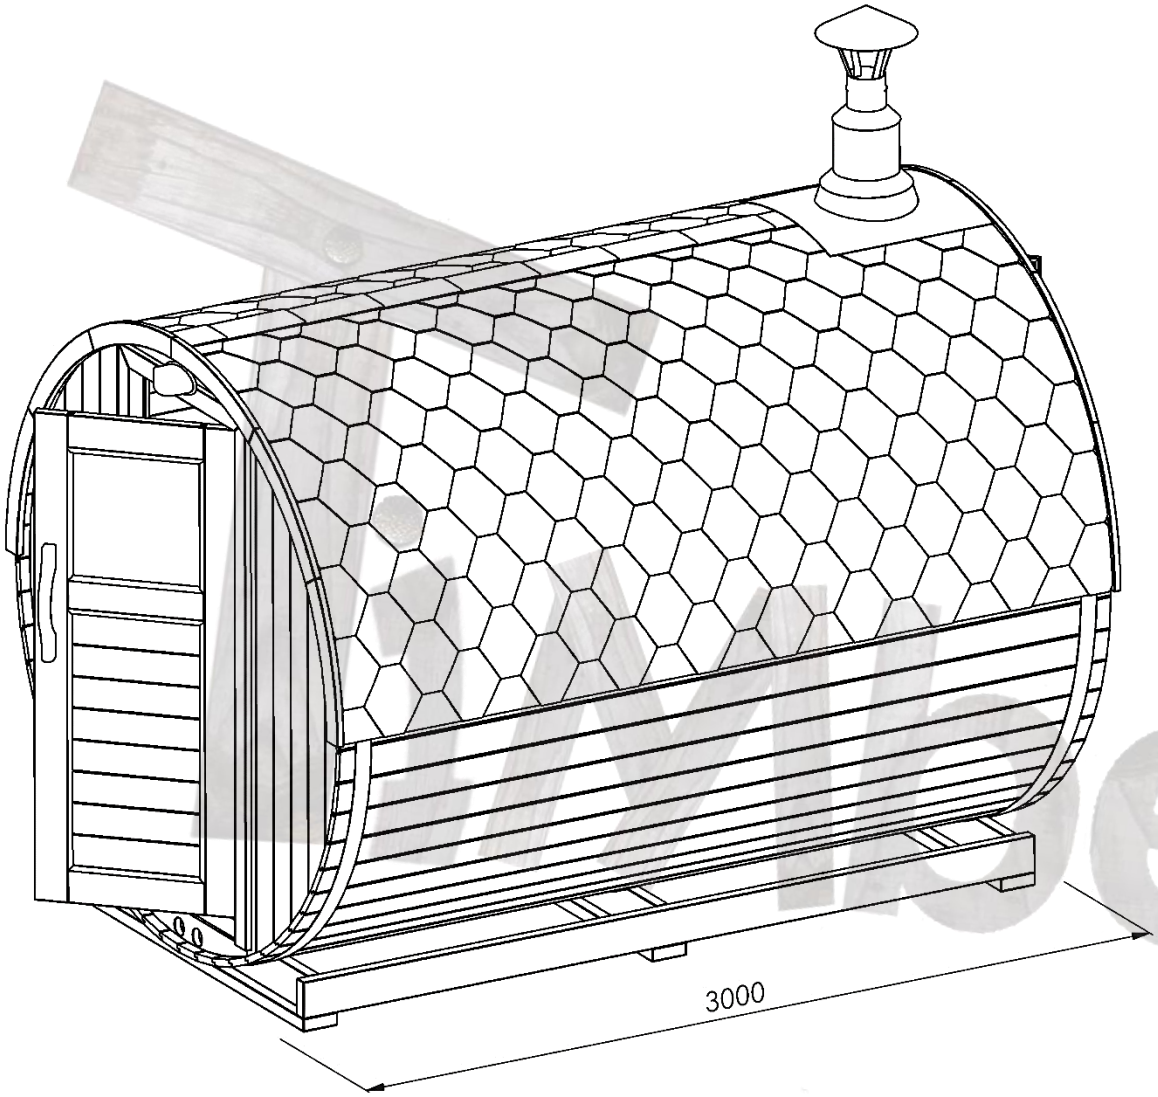


| MODEL | 3000 MM BARREL |
|---|---|
| | |
| Seating capacity | 4 - 6 |
| | |
| Length | 3000 mm |
| Diameter | 2000 or 2200 mm |
| Weight | ~1100 kg |
| | |
| Wood type | Spruce<br>Larch<br>Thermowood |
| | |
| Recommended official “Harvia” heater | Harvia M3<br>Harvia M3 SL<br>Harvia Cilindro 9 kW |
| | |


# INTERIOR LAYOUT

| MODEL – BARREL | INTERIOR LAYOUT of not insulated sauna |
|---|---|
| | |
| Length outside | 3000 mm |
| Length inside | 2800 mm |
| Width outside | 2280 mm |
| | |
| | |
| Door width | 710 mm |
| Width of the benches | 500 mm |
| | |

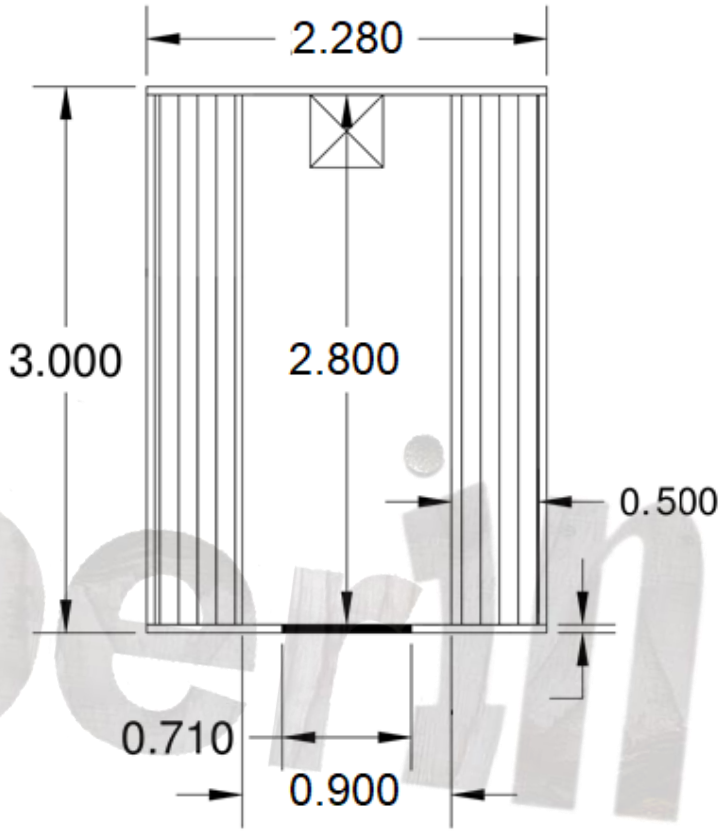


TiMberin

# BASE MEASUREMENTS

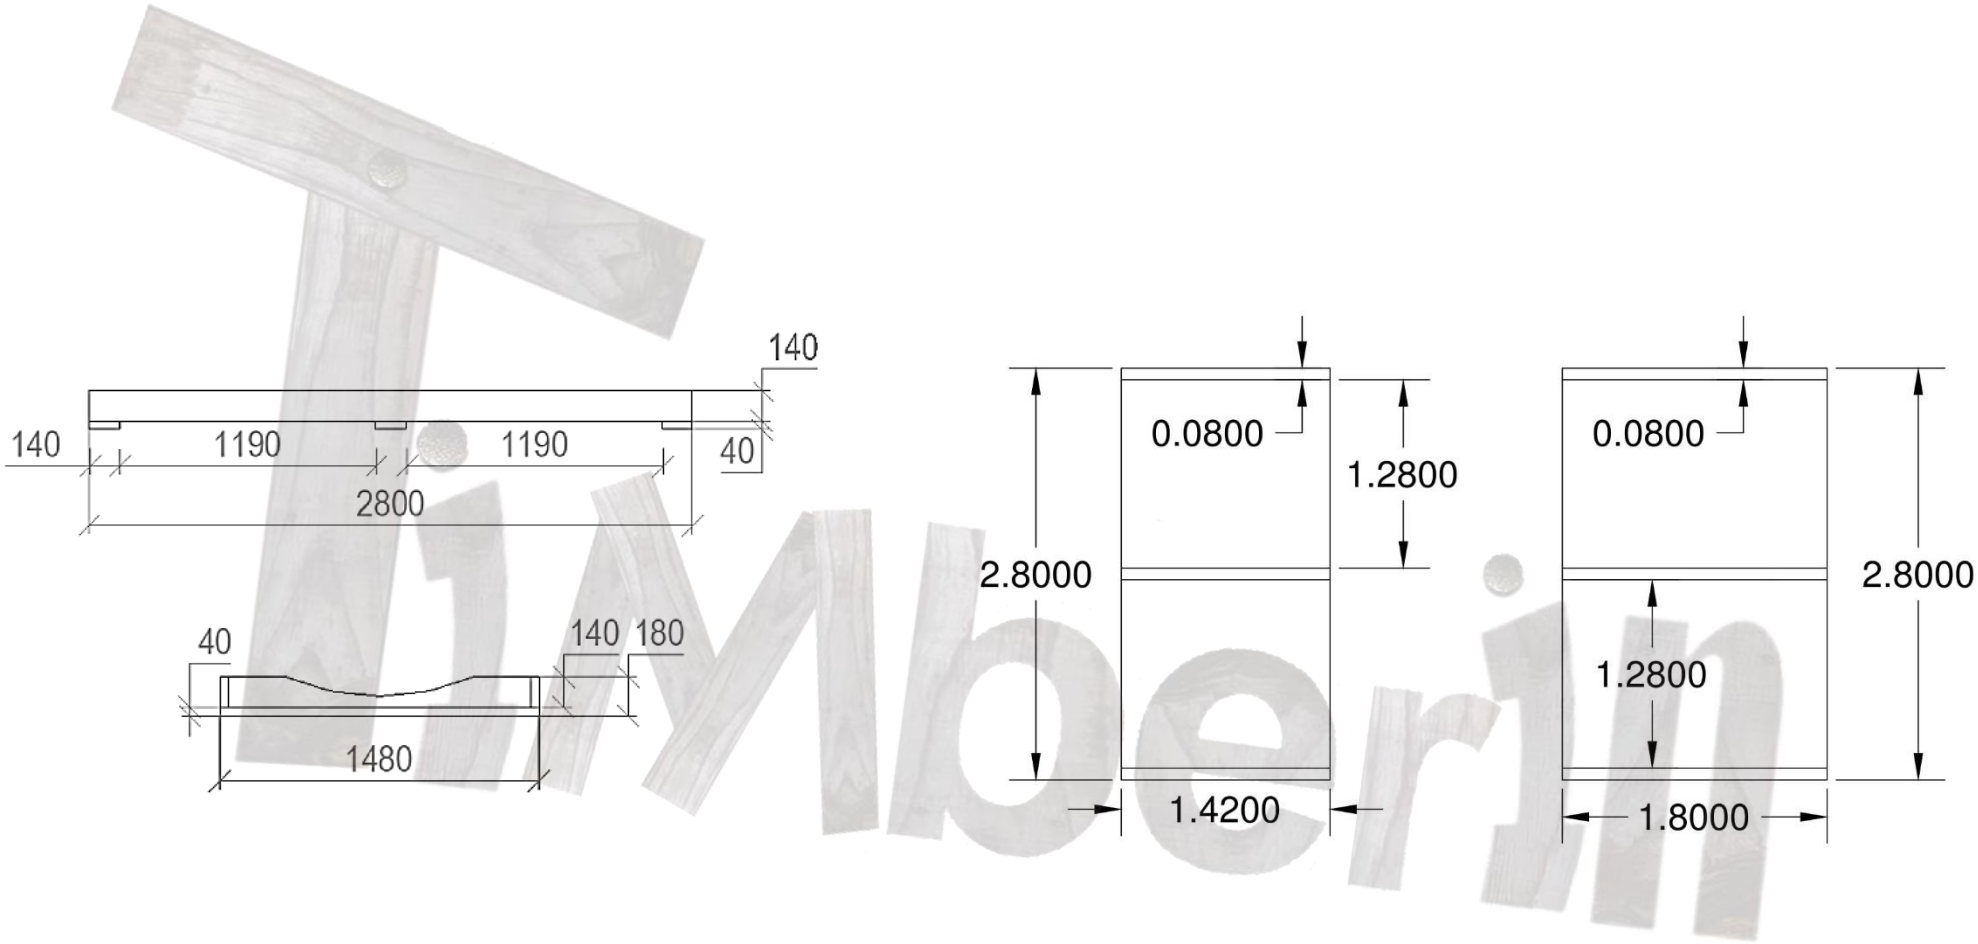



Please note that the base of the sauna may differ depending on the type of construction.

If that makes any influence on your order, please contact us separately and we will give all required information


# INTERIOR LAYOUT (2)

## of not insulated sauna


### 2000 mm sauna + 1000 mm dressing room

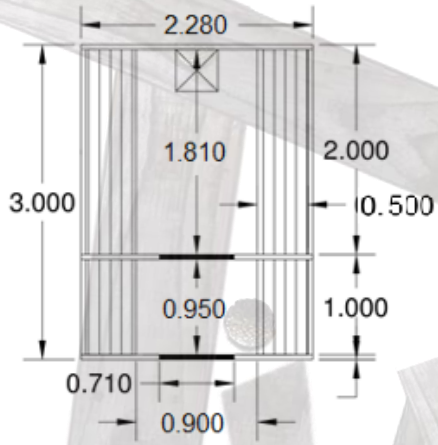


### 2000 mm sauna + 1000 mm terrace

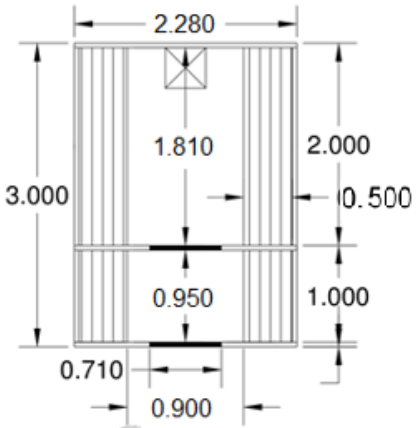



### 1500 mm sauna + 1500 mm dressing room

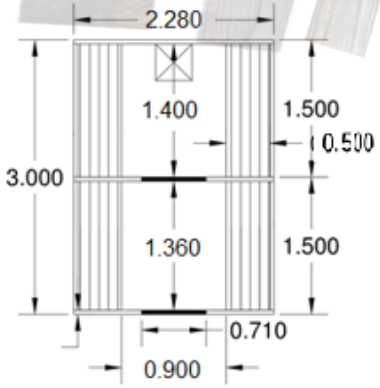



Aberin


# DELIVERY INFO

| MODEL 3000 MM BARREL | DELIVERY INFO |
|---|---|
| | |
| **Assembly kit (flat packed) sauna measurements** | Height: 1200 - 1500 mm<br>Width: 1500 mm<br>Length: 3000 mm<br><br>Weight ~1100 kg |
| **Assembled sauna measurements** | Height: 2000-2200 mm<br>Width: 2000-2200 mm<br>Length: 3000 mm<br><br>Weight ~1100 kg |
| | |

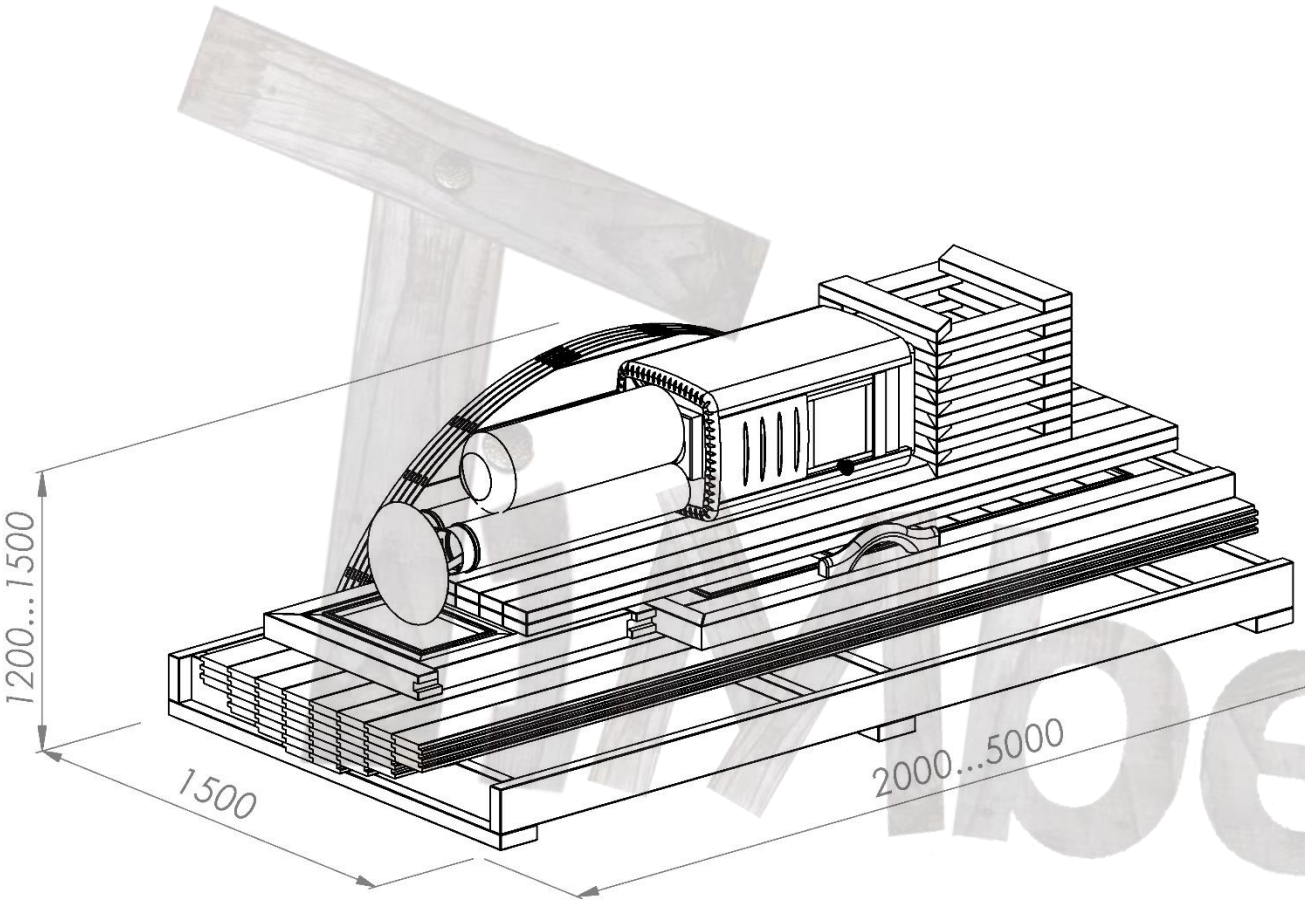

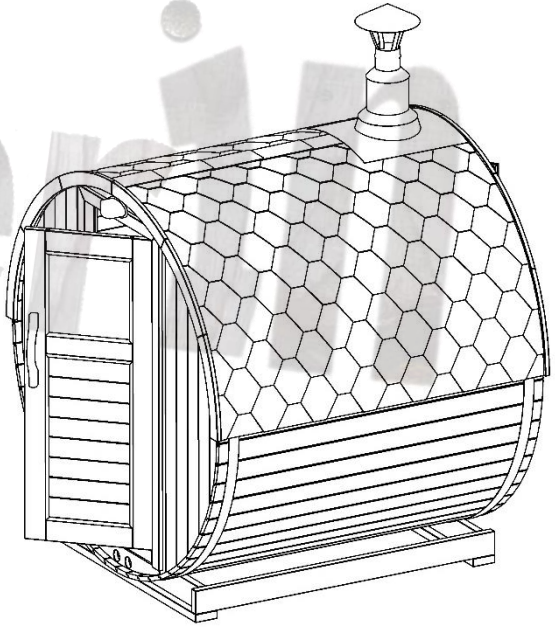
# 4000 MM BARREL SAUNA

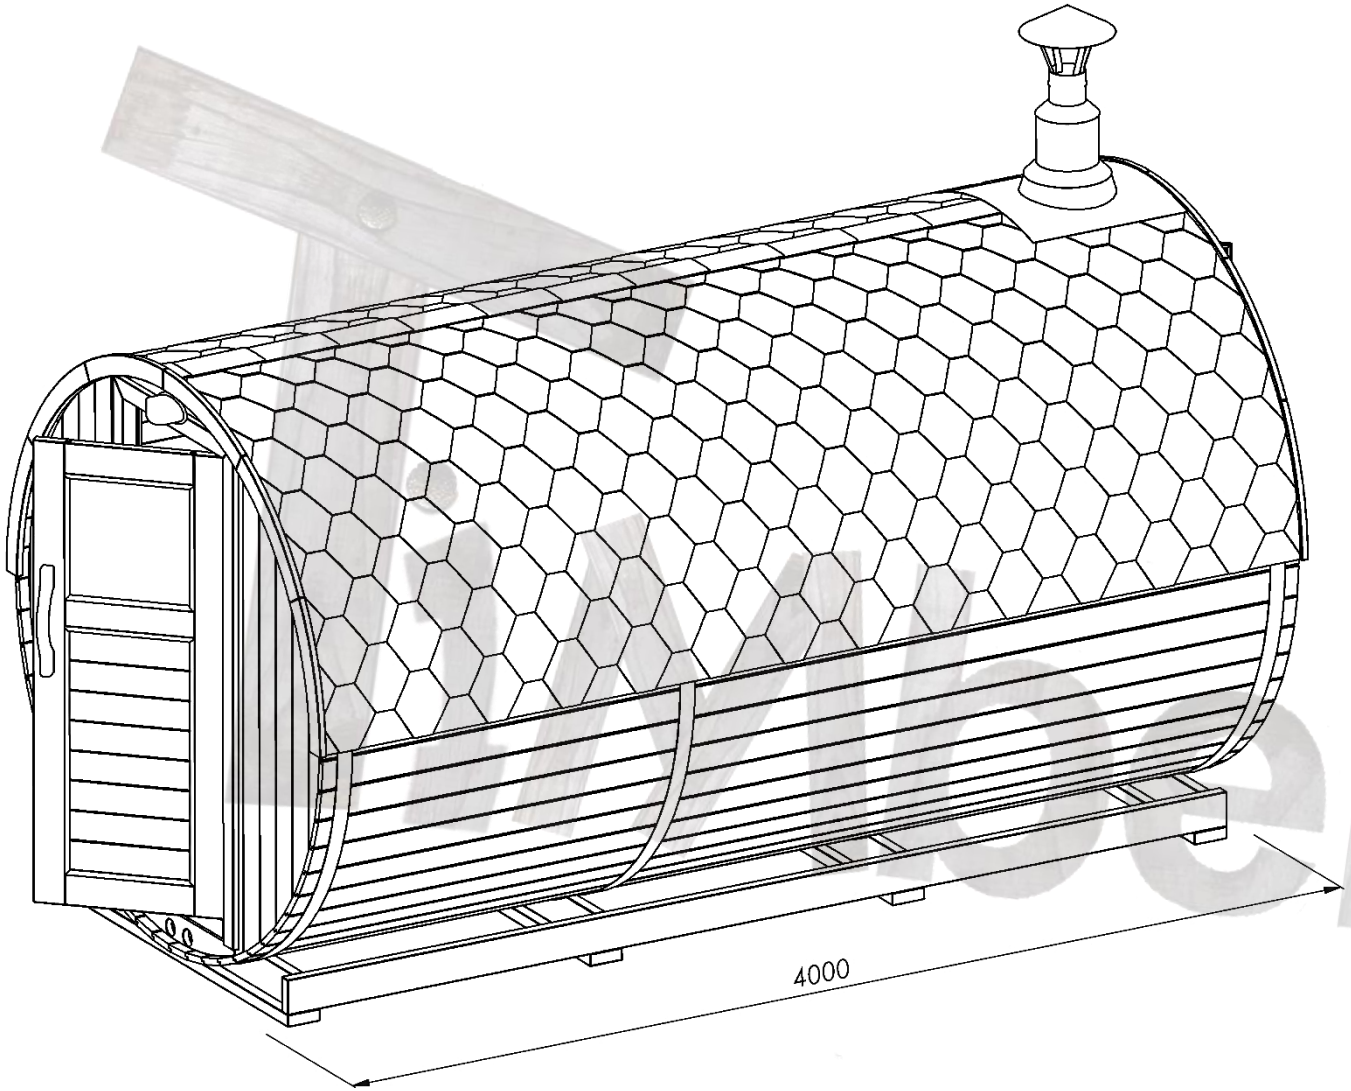



| MODEL | 4000 MM BARREL |
|---|---|
| | |
| Seating capacity | 6 - 8 |
| | |
| Length | 4000 mm |
| Diameter | 2000 or 2200 mm |
| Weight | ~1400 kg |
| | |
| Wood type | Spruce<br>Larch<br>Thermowood |
| | |
| Recommended official “Harvia” heater | Harvia 20 PRO<br>Harvia 20 SL<br>Cilindro 11 kW |
| | |


# INTERIOR LAYOUT


| MODEL – BARREL | INTERIOR LAYOUT of not insulated sauna |
|---|---|
| | |
| Length outside | 4000 mm |
| Length inside | 3800 mm |
| Width outside | 2280 mm |
| | |
| | |
| Door width | 710 mm |
| Width of the benches | 500 mm |
| | |

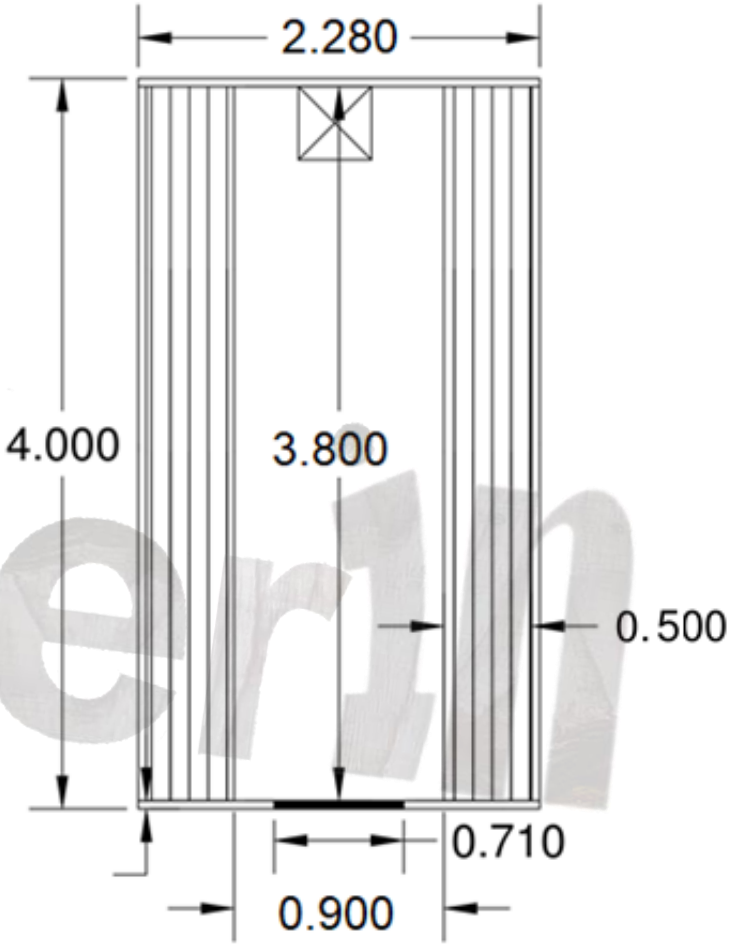

# BASE MEASUREMENTS

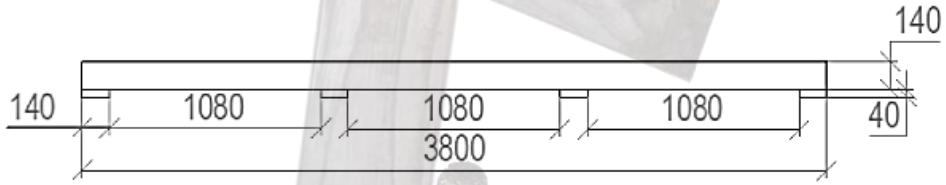

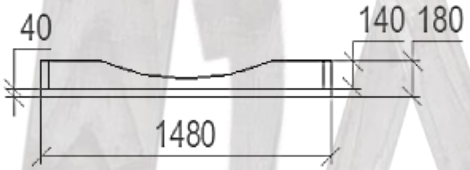
timberin

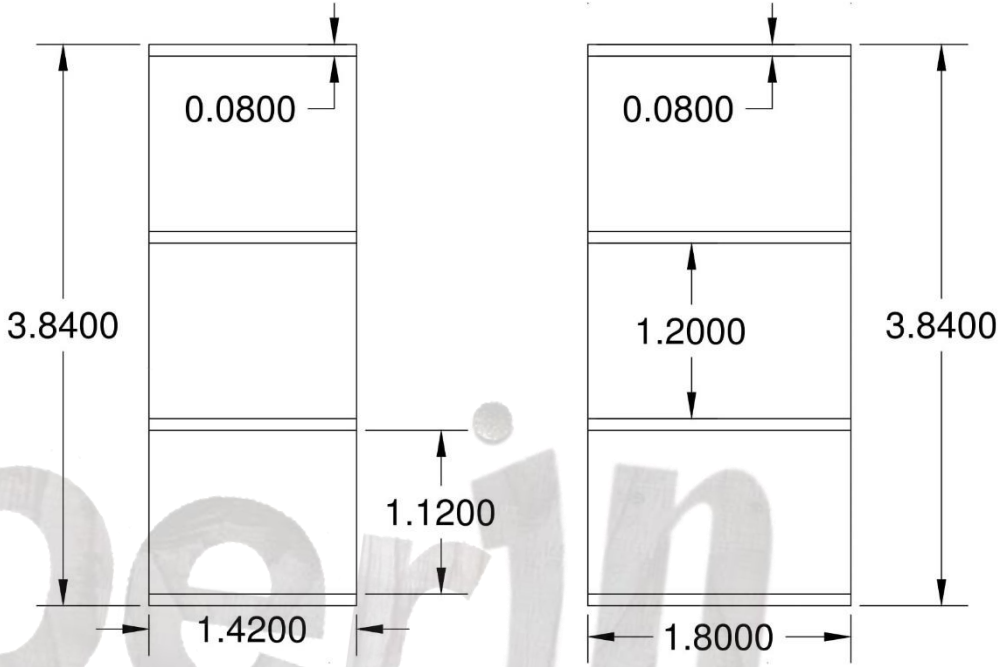
Please note that the base of the sauna may differ depending on the type of construction.

If that makes any influence on your order, please contact us separately and we will give all required information


# INTERIOR LAYOUT (2)

## of not insulated sauna


### 3000 mm sauna + 1000 mm dressing room

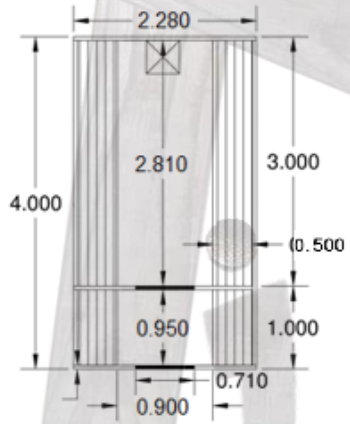



### 3000 mm sauna + 1000 mm terrace

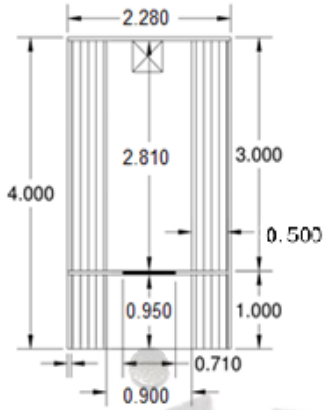


### 2500 mm sauna + 1500 mm dressing room

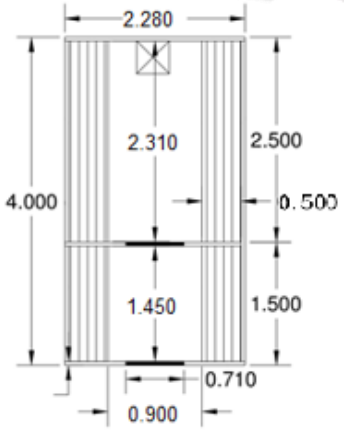



### 2000 mm sauna + 1000 mm dressing room + 1000 mm terrace

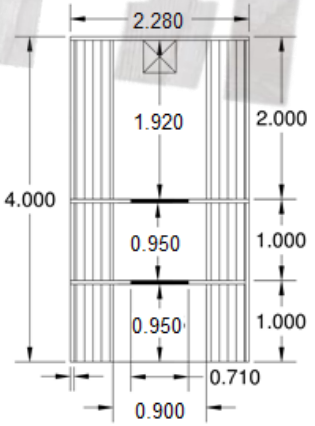



inMberin

# DELIVERY INFO

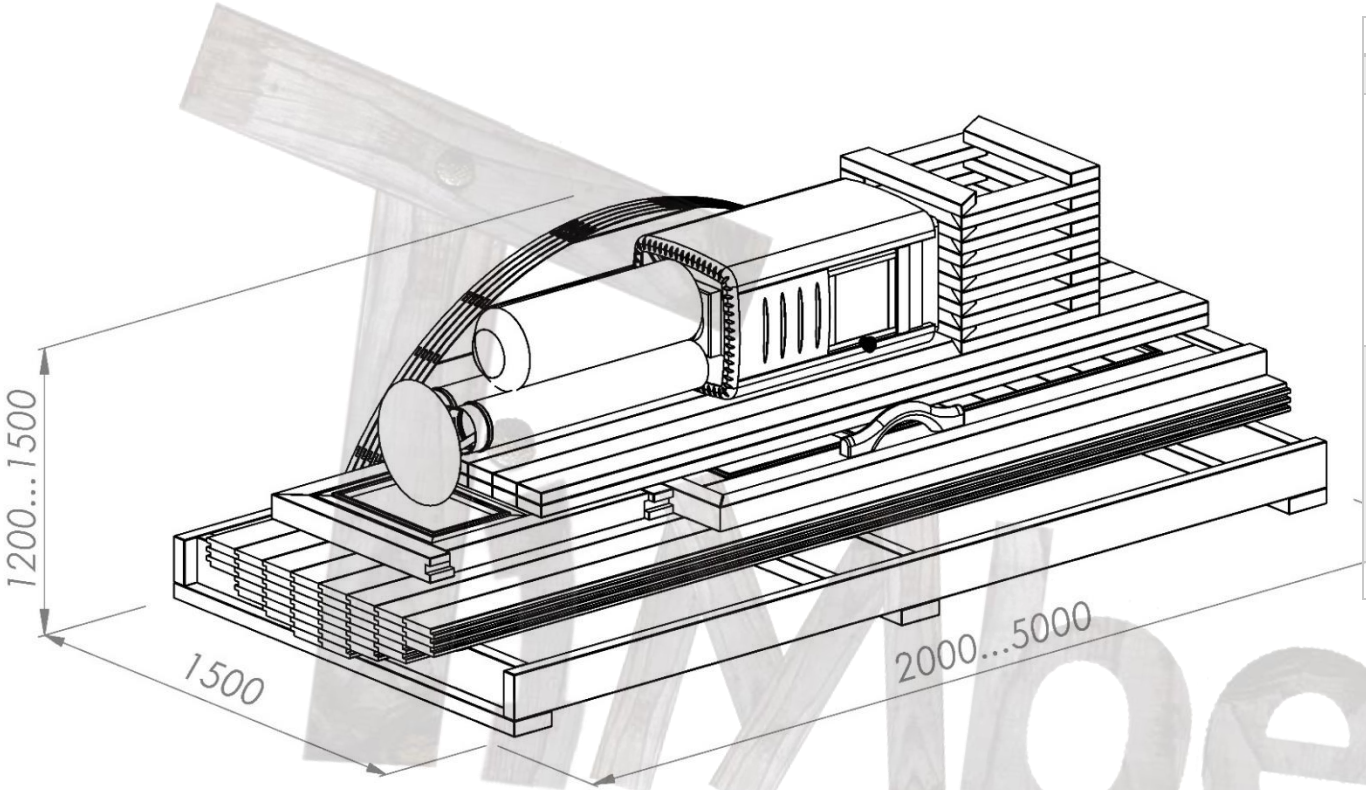



| MODEL 4000 MM BARREL | DELIVERY INFO |
|---|---|
| | |
| **Assembly kit (flat packed) sauna measurements** | Height: 1200 - 1500 mm<br>Width: 1500 mm<br>Length: 4000 mm<br><br>Weight ~1400 kg |
| **Assembled sauna measurements** | Height: 2000-2200 mm<br>Width: 2000-2200 mm<br>Length: 4000 mm<br><br>Weight ~1400 kg |
| | |

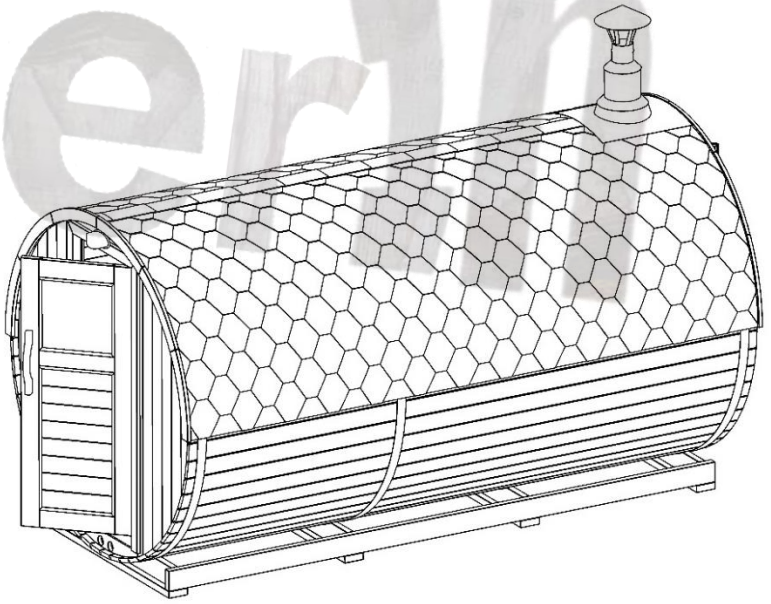

Tylberin


# 5000 MM BARREL SAUNA

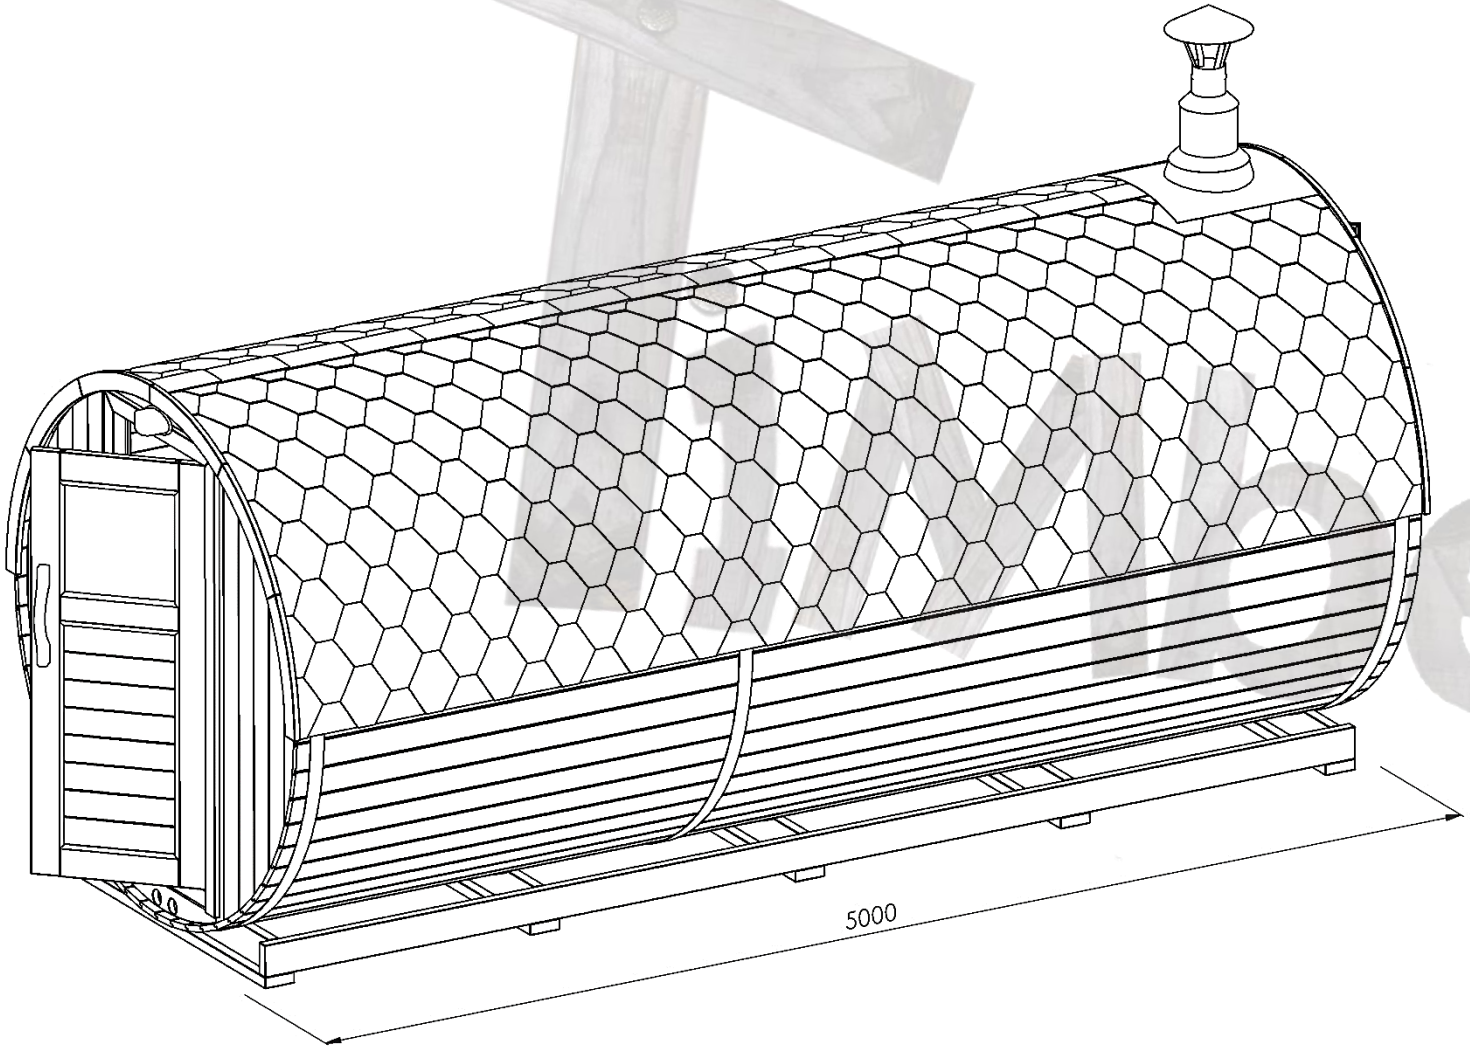



| MODEL | 5000 MM BARREL |
|---|---|
| | |
| **Seating capacity** | 8 - 10 |
| | |
| **Length** | 5000 mm |
| **Diameter** | 2000 or 2200 mm |
| **Weight** | ~1700 kg |
| | |
| **Wood type** | Spruce<br>Larch<br>Thermowood |
| | |
| **Recommended official "Harvia" heater** | Harvia 20 PRO<br>Harvia 20 SL<br>Cilindro 13 kW |
| | |


# INTERIOR LAYOUT


| MODEL – BARREL | INTERIOR LAYOUT of not insulated sauna |
|---|---|
| | |
| Length outside | 5000 mm |
| Length inside | 4800 mm |
| Width outside | 2280 mm |
| | |
| | |
| Door width | 710 mm |
| Width of the benches | 500 mm |
| | |

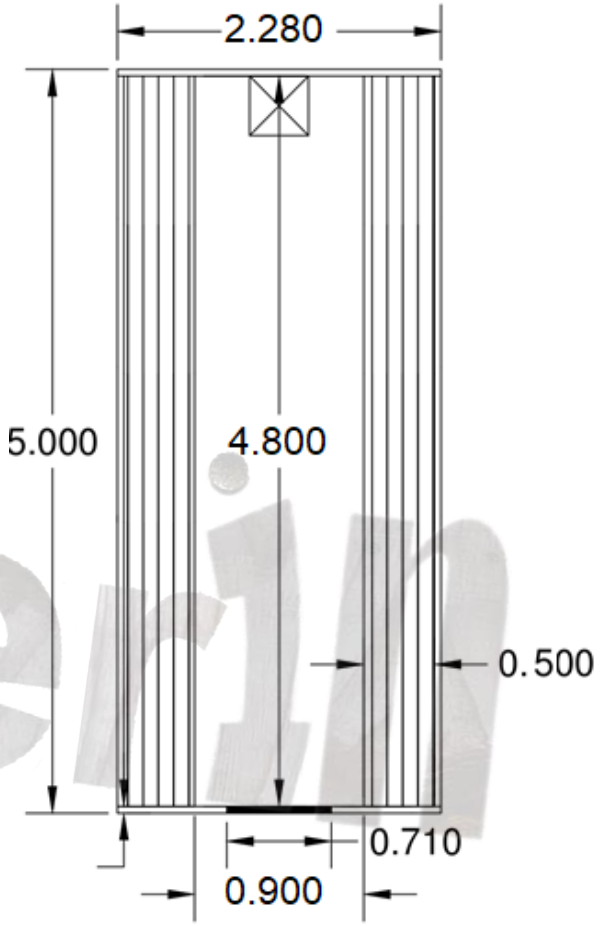

# BASE MEASUREMENTS

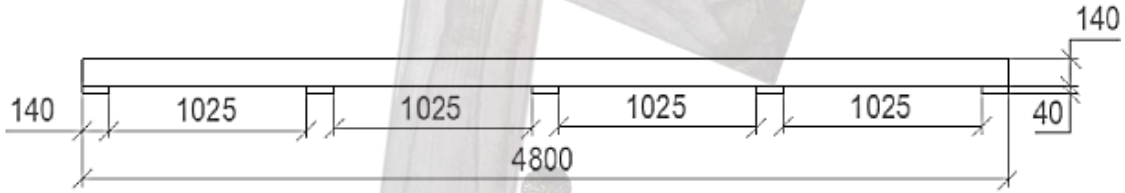

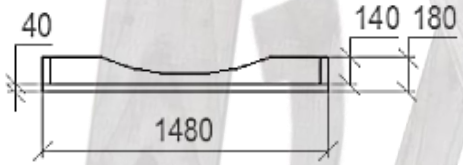

Please note that the base of the sauna may differ depending on the type of construction.

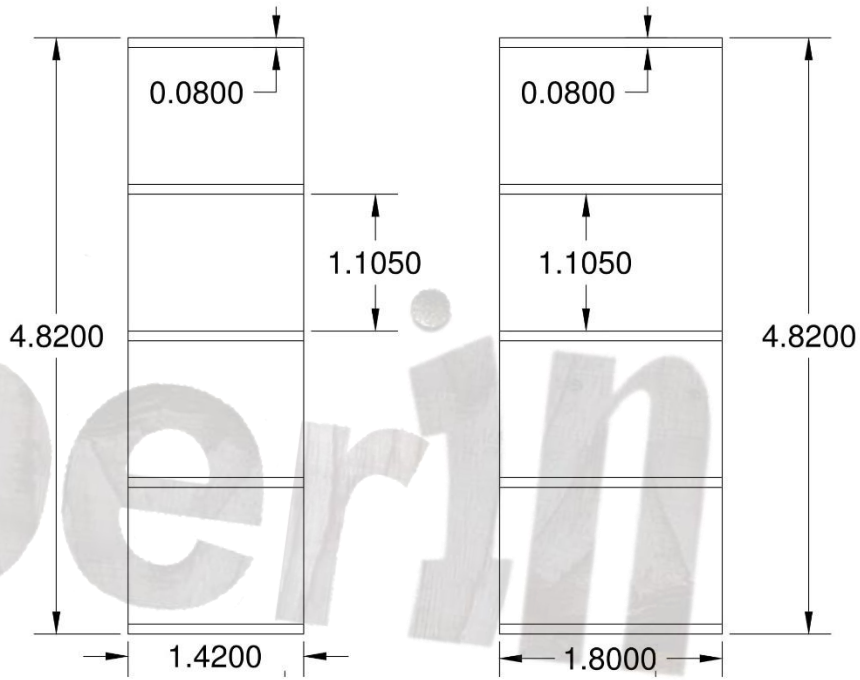If that makes any influence on your order, please contact us separately and we will give all required information


# INTERIOR LAYOUT

## of not insulated sauna


### 4000 mm sauna + 1000 mm dressing room

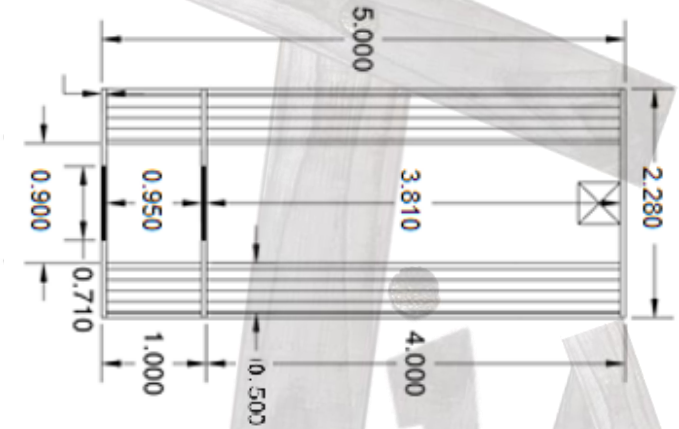



### 4000 mm sauna + 1000 mm terrace

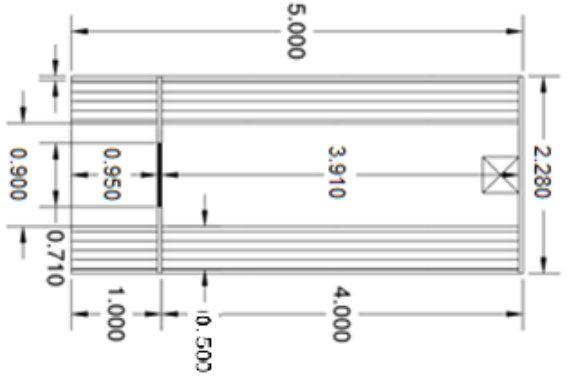


### 3500 mm sauna + 1500 mm dressing room

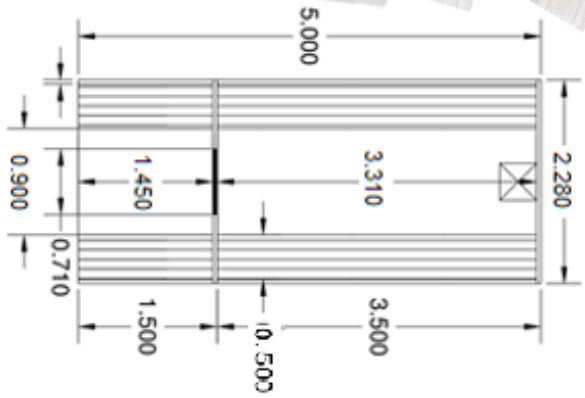



### 3000 mm sauna + 1000 mm dressing room + 1000 mm terrace

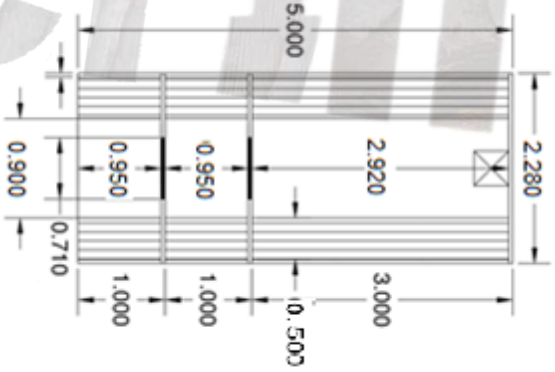



Aberin

# DELIVERY INFO

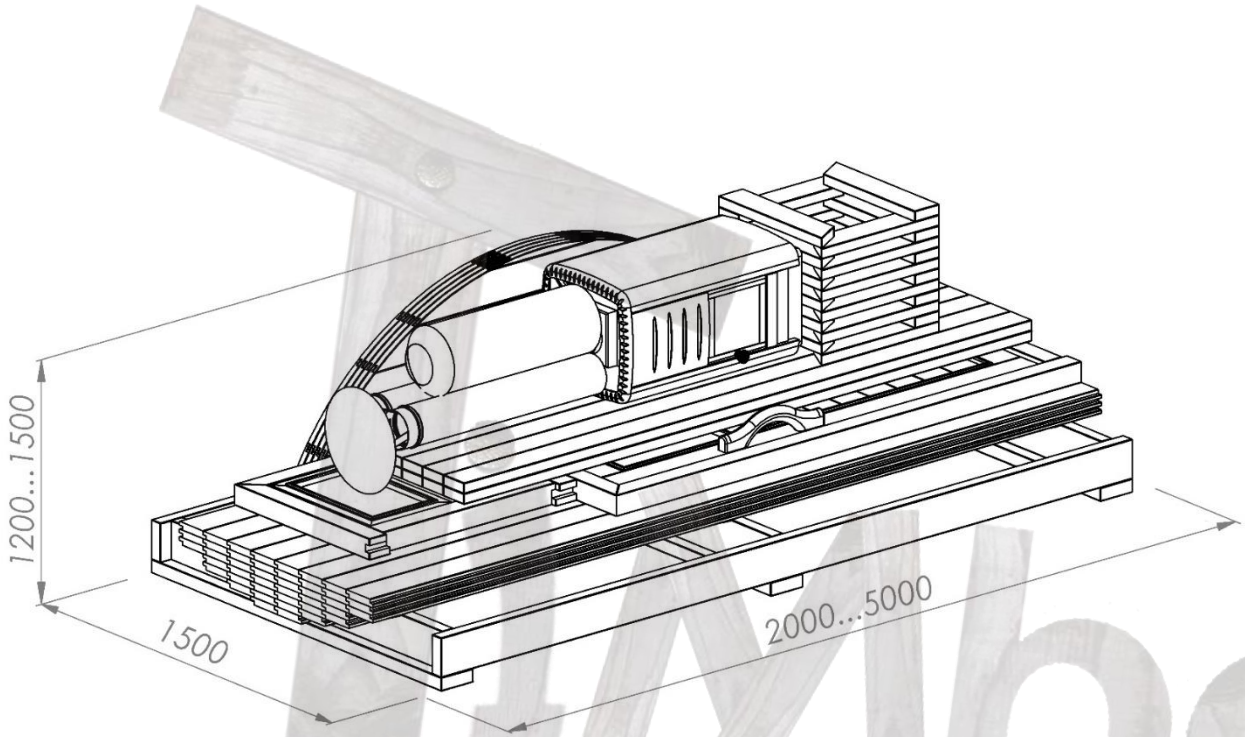


| MODEL 5000 MM BARREL | DELIVERY INFO |
|---|---|
| | |
| **Assembly kit (flat packed) sauna measurements** | Height: 1200 – 1500 mm<br>Width: 1500 mm<br>Length: 5000 mm<br><br>Weight ~1700 kg |
| **Assembled sauna measurements** | Height: 2000-2200 mm<br>Width: 2000-2200 mm<br>Length: 5000 mm<br><br>Weight ~1700 kg |
| | |

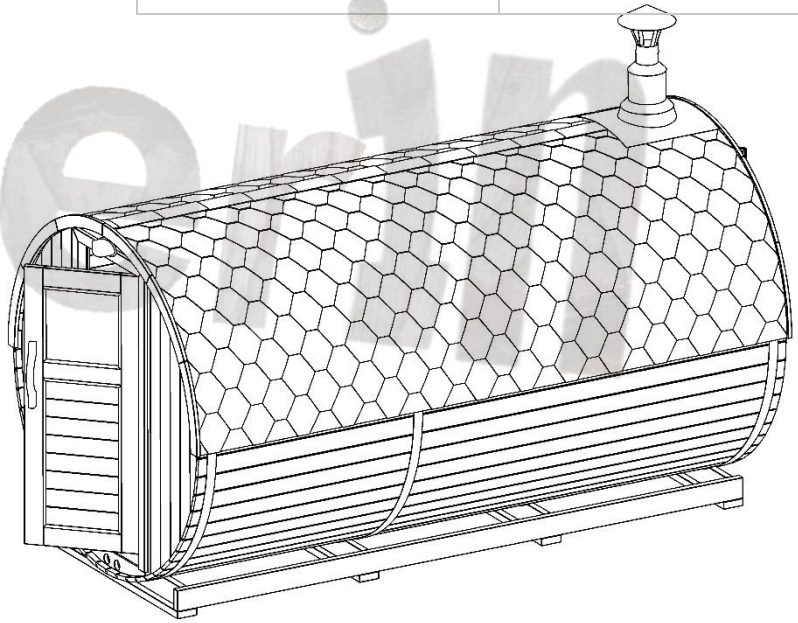

Alberin

# WOOD BURNING HARVIA HEATERS

## Recommended for 2 – 4 meter sauna room
Harvia M3 + chimney



The Harvia M3 has a classic design and is suitable for smaller, woodburning saunas. It turns a sauna bath into a pleasurable experience and adds a touch of traditional sauna atmosphere. The even heat and efficient air circulation guarantee an enjoyable bath.

**Output 16,5 kW**

**Stones max. 30 kg**

**User manual HERE**

## Recommended for 2 - 4 meter sauna room
Harvia M3 SL + chimney (logs loaded from outside instead of inside)



The SL models are designed for people who want to conveniently heat their sauna from another room or outside the building. SL stoves provide great bathing in small and medium-sized saunas.

**Output 16,5 kW**

**Stones max. 30 kg**

**User manual HERE**

## Recommended for 4 – 5 meter sauna room
Harvia 20 PRO + chimney



Harvia 20 Pro gives a good hot bath in medium-sized saunas. It has a big stone space and an air-flow spoiler made of stainless steel. Through the cast-iron glass door the warm glow of the fire adds to the sauna atmosphere.

**Output 24,1 kW**

**Stones max. 40 kg**

**User manual HERE**

## Recommended for 4 – 5 meter sauna room
Harvia 20 SL + chimney (logs loaded from outside instead of inside)



The SL models are designed for people who want to conveniently heat their sauna from another room or outside the building. SL stoves provide great bathing in small and medium-sized saunas.

**Output 24,1 kW**

**Stones max. 40 kg**

**User manual HERE**

# WOOD BURNING HARVIA HEATER SAFETY DISTANCES APPLIED IN TIMBERIN SAUNAS ACCORING TO OFFICIAL HARVIA HEATERS SAFETY REQUIREMENTS

**HARVIA M3 / HARVIA M3 SL:**

- Walls and benches made of inflammable materials. The minimum safety distances to inflammable materials:
  - on either side – 25 cm (B),
  - behind the stove – 30 cm (C), *due to installed cetris panel behind the heater the distance can be minimized,*
  - in the front – approx. 30 cm (D).
- Heater ground area is covered with cetris panel.

**HARVIA 20 PRO / HARVIA 20 SL:**

- Walls and benches made of inflammable materials. The minimum safety distances to inflammable materials:
  - on either side – 30 cm (B),
  - behind the stove – 30 cm (C), *due to installed cetris panel behind the heater the distance can be minimized,*
  - in the front – approx. 30 cm (D).
- Heater ground area is covered with cetris panel.

**SAUNA CHIMNEY:**

- Non insulated chimney min. 50 cm from inflammable materials (*side materials can be cover with cetris panel to reduce the distance*).
- Insulation between roof and insulated chimney min. 10 cm.
- Chimney insulation going down from the roof min. 43 cm.

| | A min. | B min. | C min. | D min. |
|---|---|---|---|---|
| M1, M2, M3/SL, Classic 140 | 1200 | 250 | 300 | 300 |
| 20 Pro, 20 SL/Duo, 20 ES Pro/S, 20 Boiler, 20 SL Boiler, Premium/VS, Classic 220/Duo, 20 RS/LS Pro | 1300 | 300 | 300 | 300 |
| 26 Pro, Classic 280 | 1280 | 375 | 375 | 375 |
| 36, 36 Duo | 1250 | 500 | 500 | 500 |
| Linear 16, 16 | 1300 | 300 | 350 | 400 |
| Linear 22, 22/S, Linear 22 RS/LS/ES, 22 RS/LS/ES S | 1265 | 400 | 380 | 500 |
| Linear 28 | 1380 | 400 | 400 | 500 |

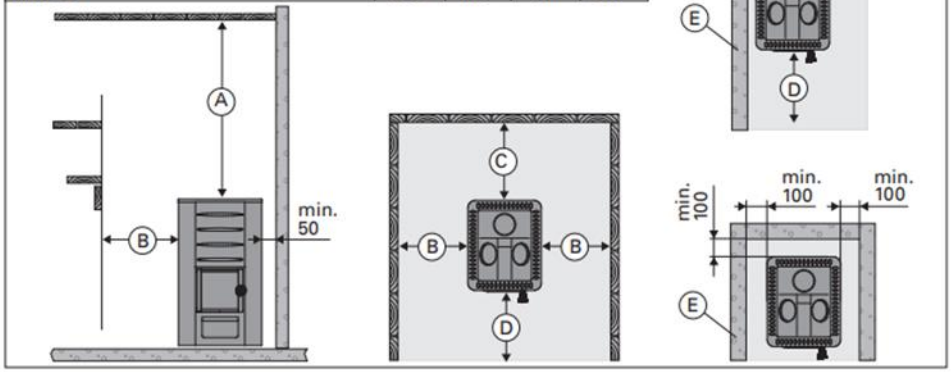



*Figure 1 Safety distances (all dimensions in millimeters)*

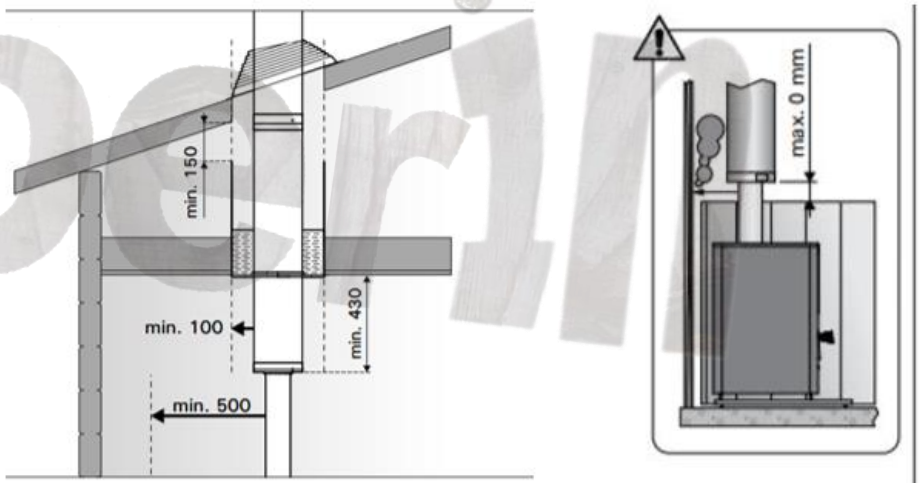




*Figure 2 Safety distances for chimney (all dimensions in millimeters)*

# ELECTRIC HARVIA HEATERS

| Recommended for 2 – 3 meter sauna room<br>Cilindro 9 kW (PC90) with an integrated control unit | Recommended for 4 meter sauna room<br>Cilindro 11kW (PC110XE) including a digital Harvia Xenio control panel. |
|---|---|
| <br>Harvia Cilindro electric heater's massive sauna stone amount provides enjoyable sauna bath. Cilindro has an apertured outer casing made of stainless steel. You can adjust the nature of the heat from soft to sharp by throwing water either to the side of the heater or straight on top of the stone pillar.<br>**Output 9 kW**<br>**Stones max. 80 kg**<br>**User manual HERE** | <br>Harvia Cilindro 110EX heaters provide a smooth, yet powerful heat in saunas of all sizes. Exterior made from stainless steel looks impressive and is a great addition to any sauna. Sauna temperature can be seen in the digital display.<br>**Output 10.8 kW**<br>**Stones max. 120 kg**<br>**User manual HERE** |

iMberin

# THERMAL INSULATION

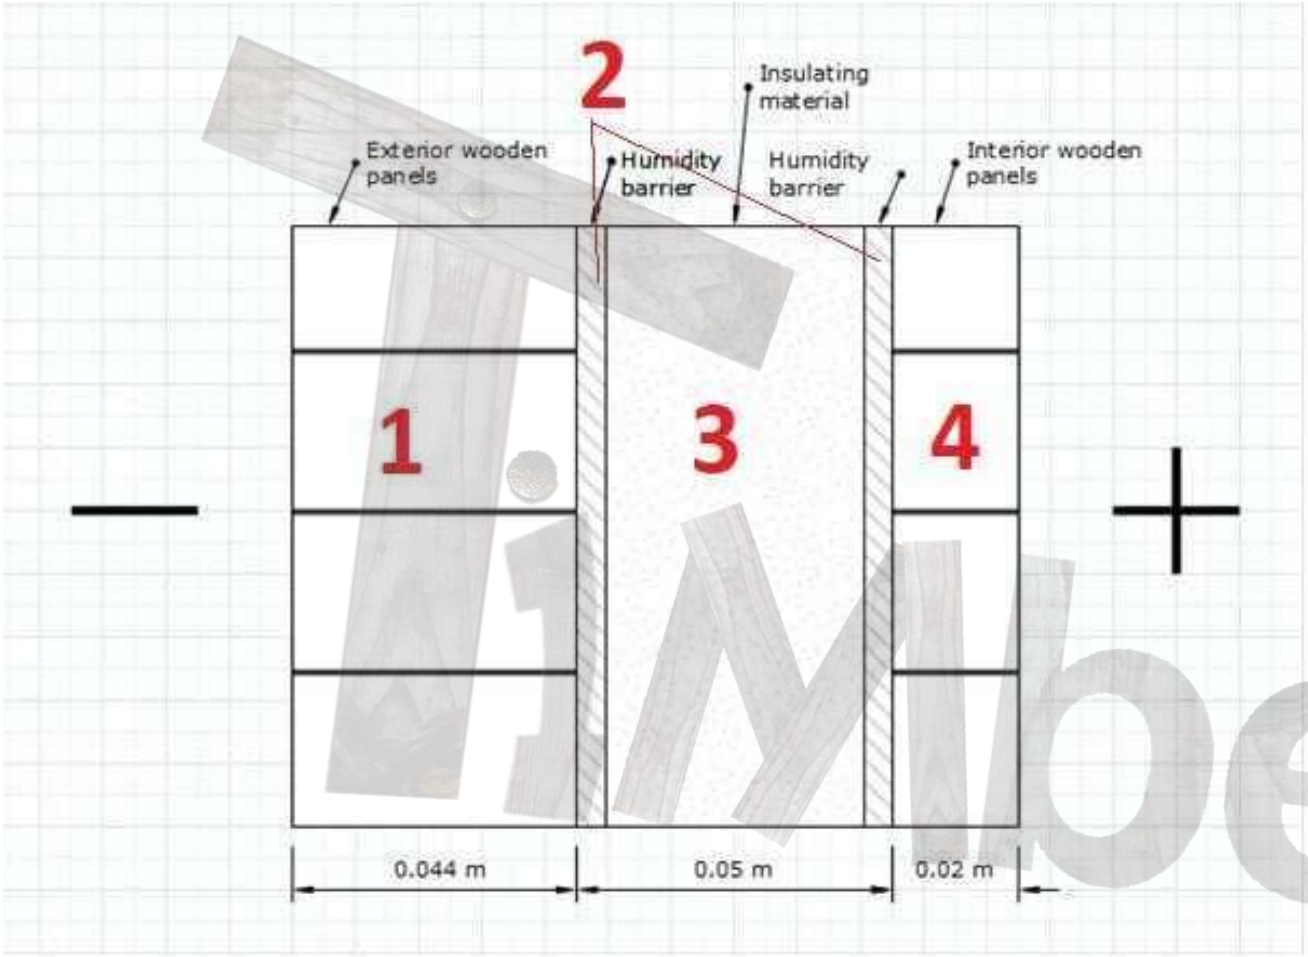


**THE CROSS-SECTION VIEW OF INSULATED OUTDOOR SAUNA`S WALL**

The first one (1) represents the wooden panels (44 mm thick).

The second one (2) – humidity barrier. The main aim of the humidity barrier is to eliminate the penetration of water or vapor to the insulation layer (3).


The nature of humidity barrier from outside and inside is different. The outside layer waterproofs the insulation and the inside humidity barrier does not allow the vapor to penetrate to the insulation layer. They both are very thin therefore their thickness is not mentioned.

The fourth (4) and the last layer is interior wooden panels, they are 20 mm of thickness. They are needed to support the insulation layer. It must be noted that the humidity barrier from the outside does not necessarily always have to be there. It depends on the type of sauna. The external wooden panels which form the wall of sauna are usually covered with bituminous shingles which act as waterproofing layer as well.

If you need more information then check our article HERE

# PANORAMIC WINDOW TYPES


## STANDARD WINDOW

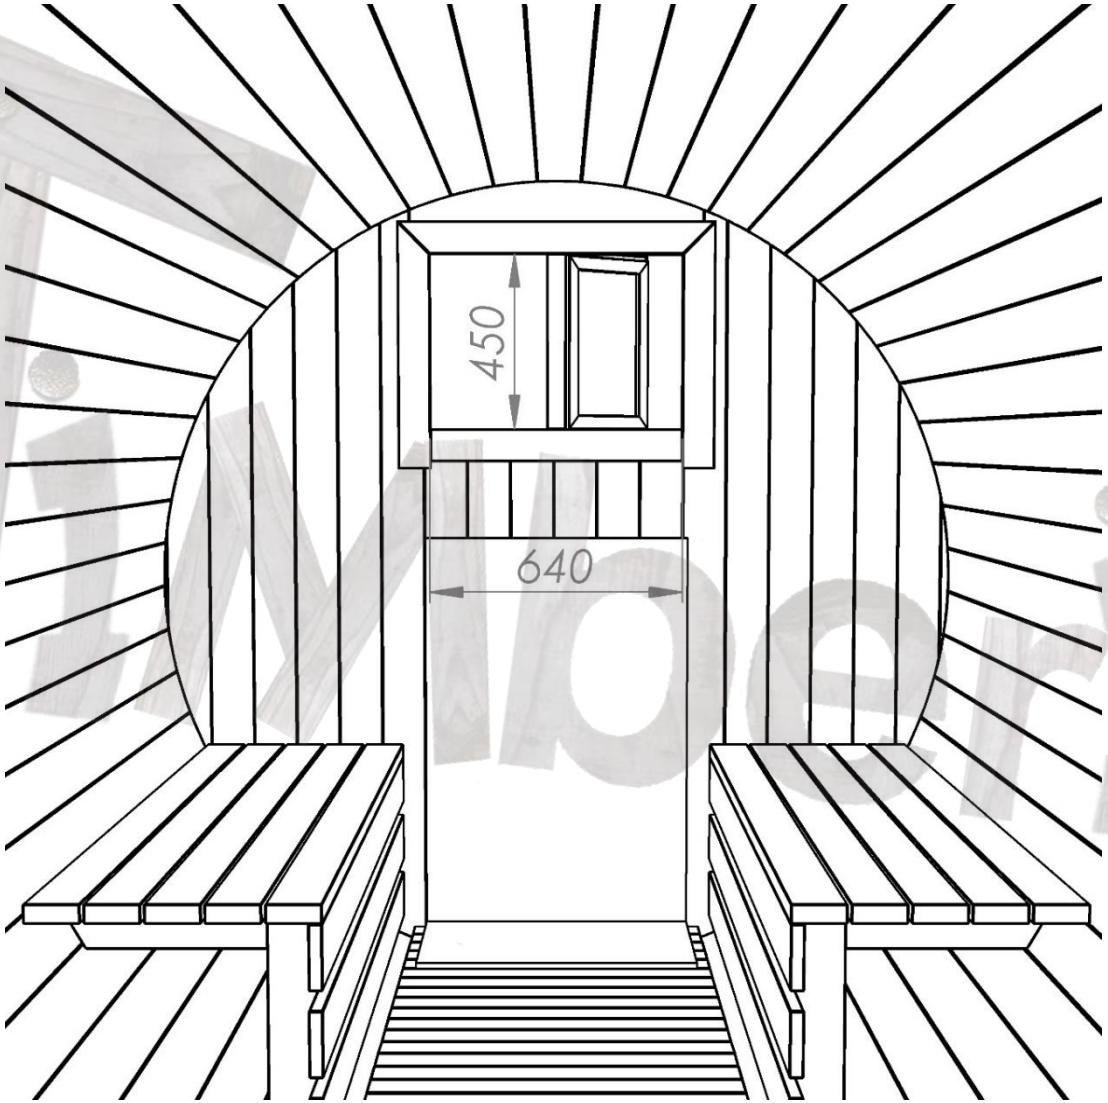



| STANDARD WINDOW |
| --- |
| |
| Height: 450 mm<br>Width: 640 mm |

**Please note that the manufacturer depending on the model might install wooden edges for decorative / constructional purposes.

# HALF PANORAMIC WINDOW

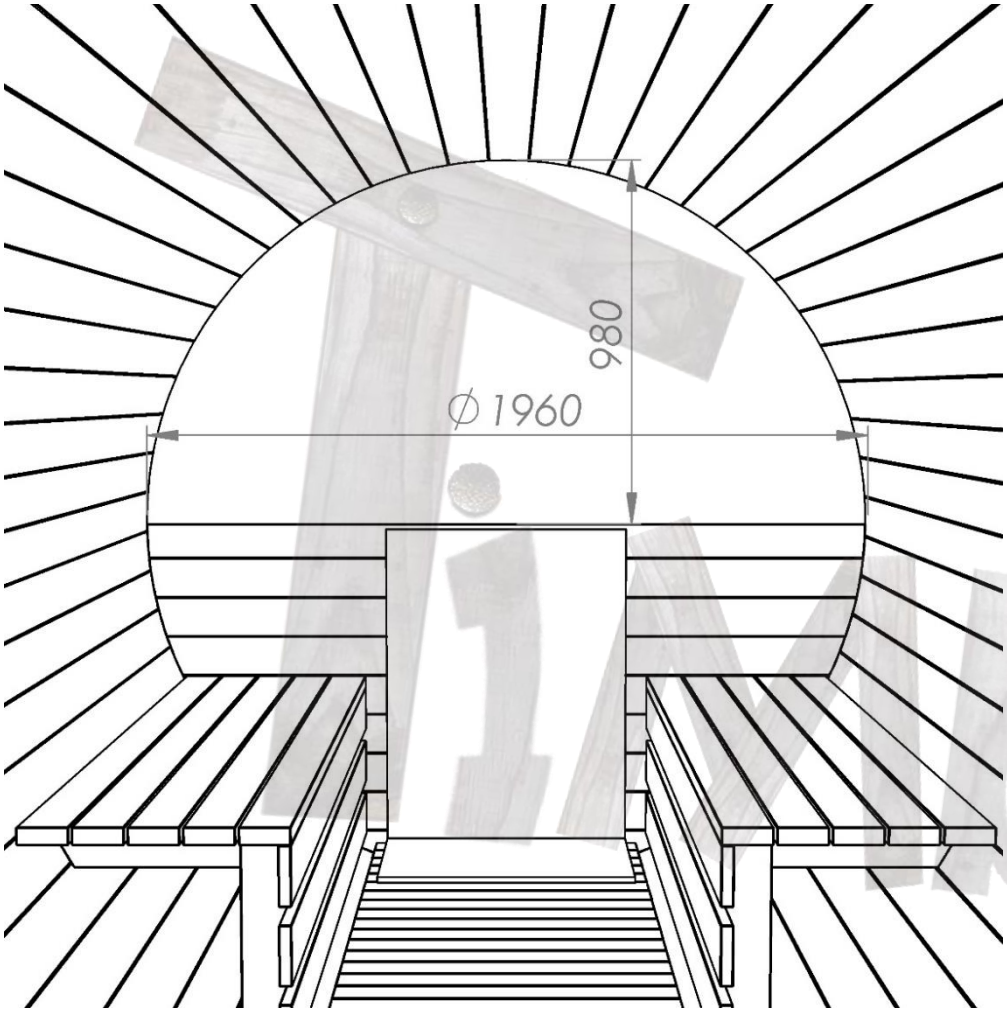



| HALF PANORAMIC WINDOW<br>ON ⌀2000 SAUNA |
| --- |
| Height: 980 mm<br>Width: 1960 mm |

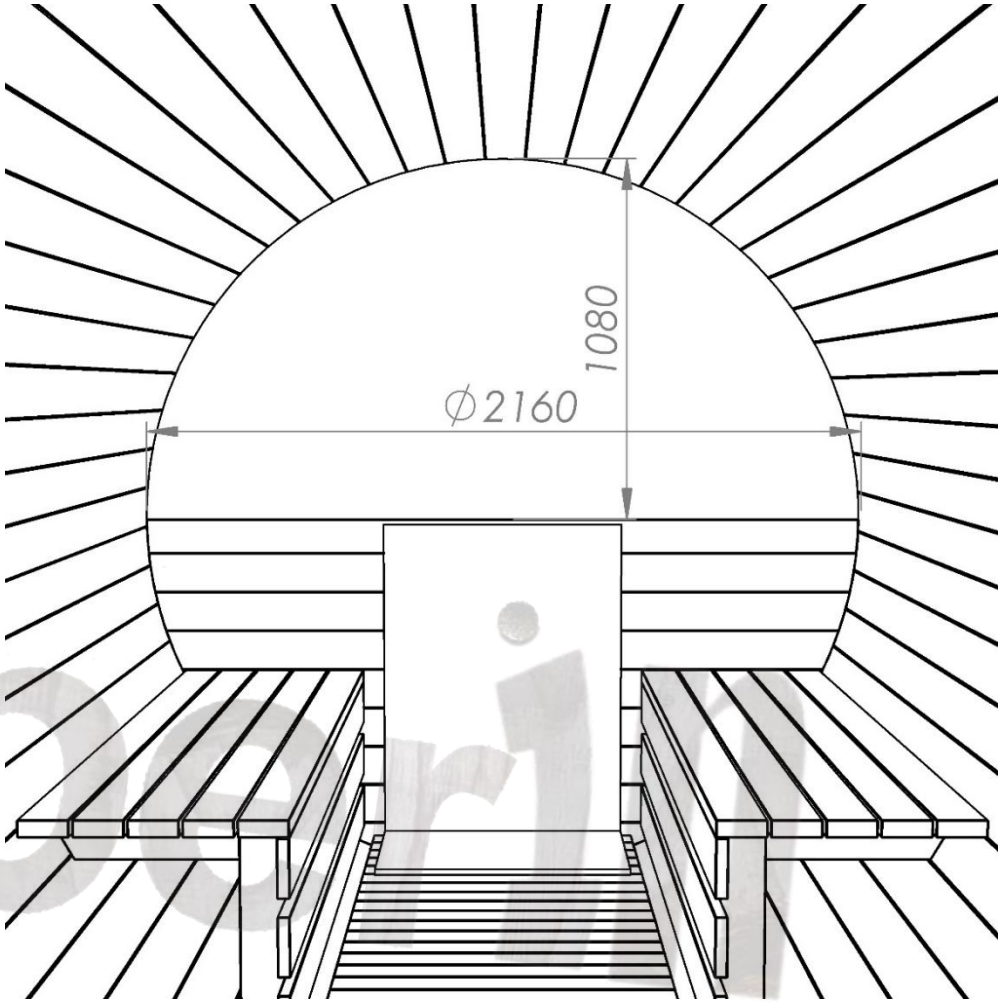



| HALF PANORAMIC WINDOW<br>ON ⌀2200 SAUNA |
| --- |
| Height: 1080 mm<br>Width: 2160 mm |

**Please note that the manufacturer depending on the model might install wooden edges for decorative / constructional purposes.

# FULL PANORAMIC WINDOW

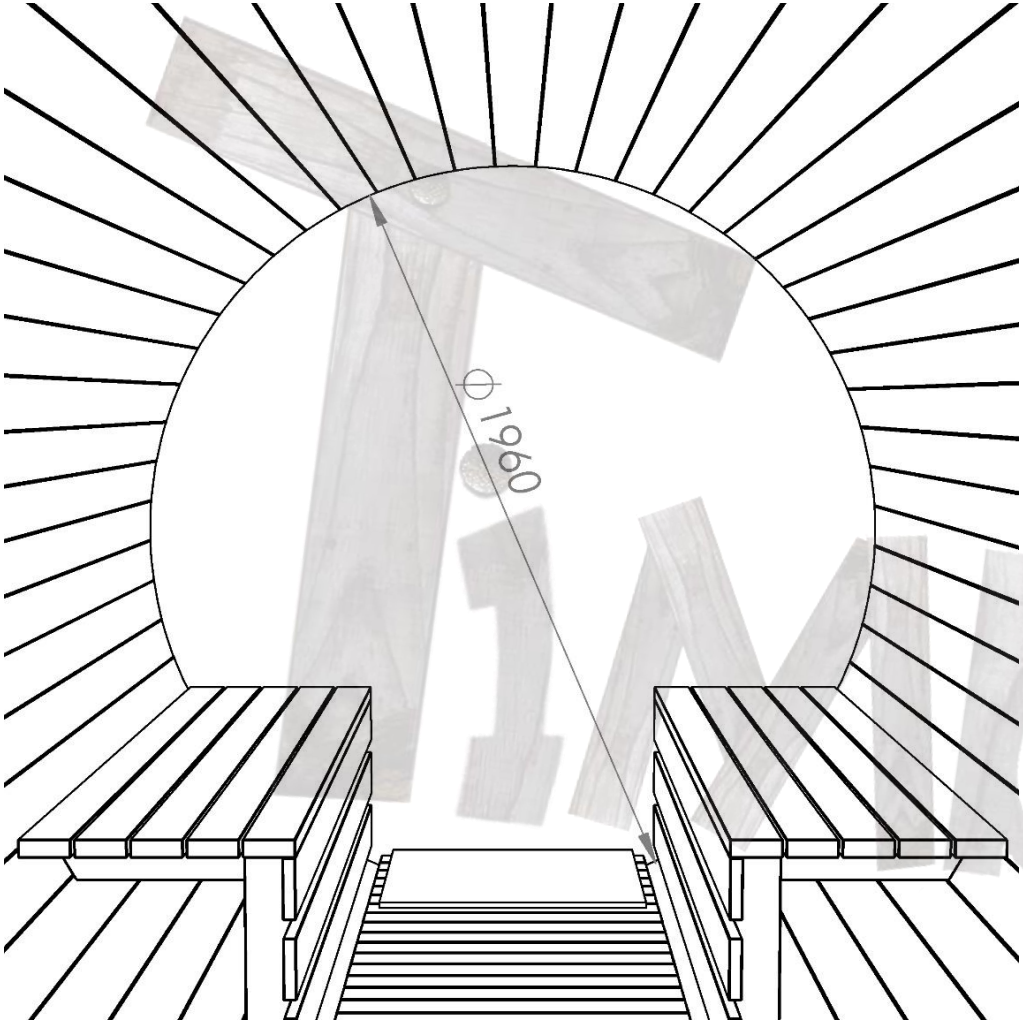


| FULL PANORAMIC WINDOW |
| --- |
| ON ⌀2000 SAUNA |
| Diameter: 1960 mm |

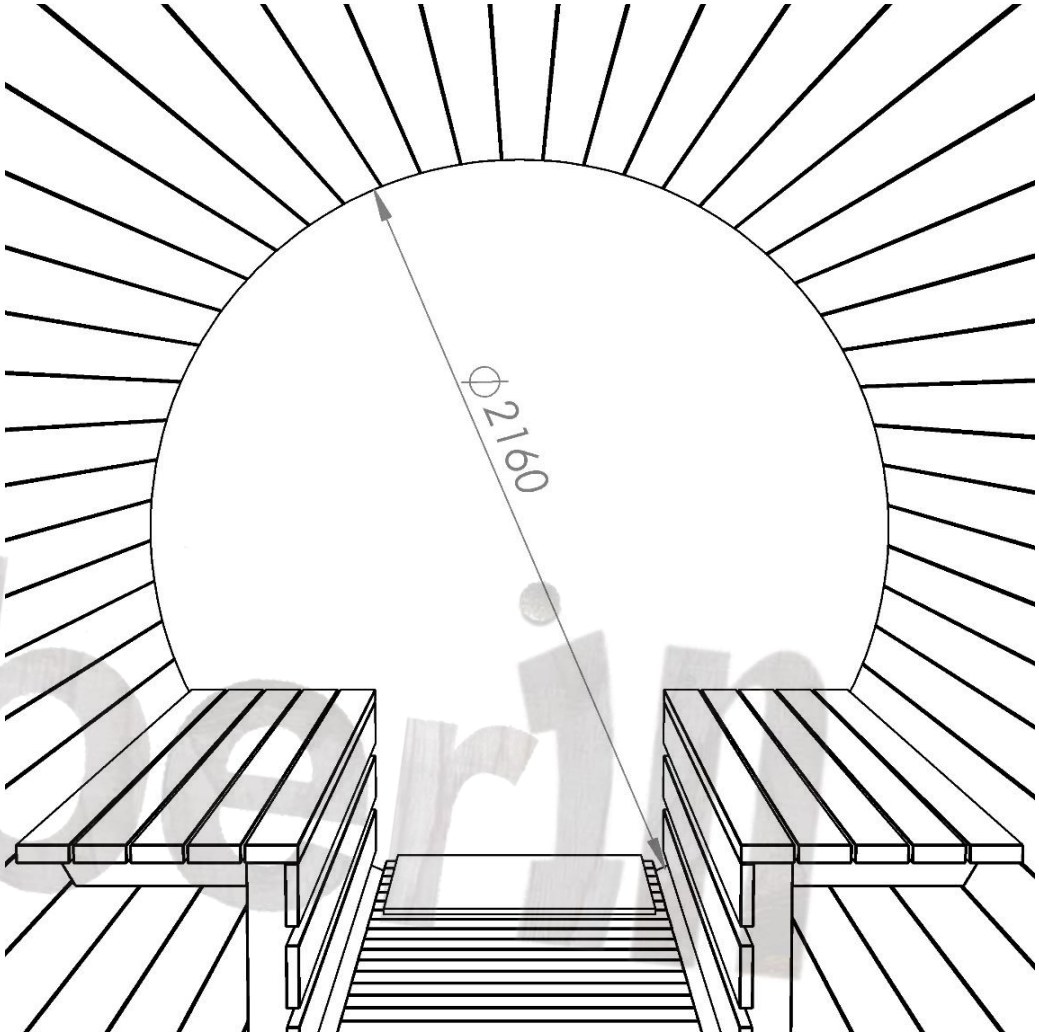


| FULL PANORAMIC WINDOW |
| --- |
| ON ⌀2200 SAUNA |
| Diameter: 2160 mm |

**Please note that the manufacturer depending on the model might install wooden edges for decorative / constructional purposes.

# ADDITIONAL INFORMATION

The following pages add current TimberIN information (data as of 11/2026) to the original technical sheet on the previous pages. If a detail differs, please ask us; the approved order drawing applies.

### In this section


HARVIA HEATERS ..... 32
THERMAL INSULATION (OPTIONAL) ..... 33
WINDOWS ..... 34
ROOF COLOURS AND ACCESSORIES ..... 35
MOBILE VERSION – NORDIC NOMAD ..... 36
TRAILER (MOBILE VERSION) ..... 37


# HARVIA HEATERS

| Heater | Type | Output | Sauna room | |
|---|---|---|---|---|
| **Harvia M3 + chimney** | Wood, loaded inside | 16.5 kW | 2–4 m | Included |
| **Harvia M3 SL + chimney** | Wood, logs loaded from outside | 16.5 kW | 2–4 m | Upgrade |
| **Harvia 20 PRO + chimney** | Wood, loaded inside | 24.1 kW | 4–5 m | Upgrade |
| **Harvia 20 SL + chimney** | Wood, logs loaded from outside | 24.1 kW | 4–5 m | Upgrade |
| **Harvia Cilindro PC90** | Electric, integrated controls | 9 kW | 2–3 m | Included |
| **Harvia Cilindro PC90XW WiFi Steel** | Electric, Wi-Fi controls | 9 kW | 2–3 m | Upgrade |
| **Harvia Legend PO110FC WiFi** | Electric, Wi-Fi controls | 10.8 kW | by hot-room volume | Upgrade |

One heater is included in the price: the M3 with chimney or the Cilindro PC90; choose exactly one. Sauna room = the heated room only, without any changing room or terrace. Heating depends on the hot-room volume, glazing and insulation; we confirm the heater for your final plan.

Electric supply: PC90 / PC90XW 400 V 3N~, 3 × 16 A, cable 5 × 2.5 mm²; PC90 also 230 V 1N~, 1 × 40 A; Legend PO110FC 400 V 3N~. A qualified electrician designs the supply, cable and protection from the heater manual.

# THERMAL INSULATION (OPTIONAL)

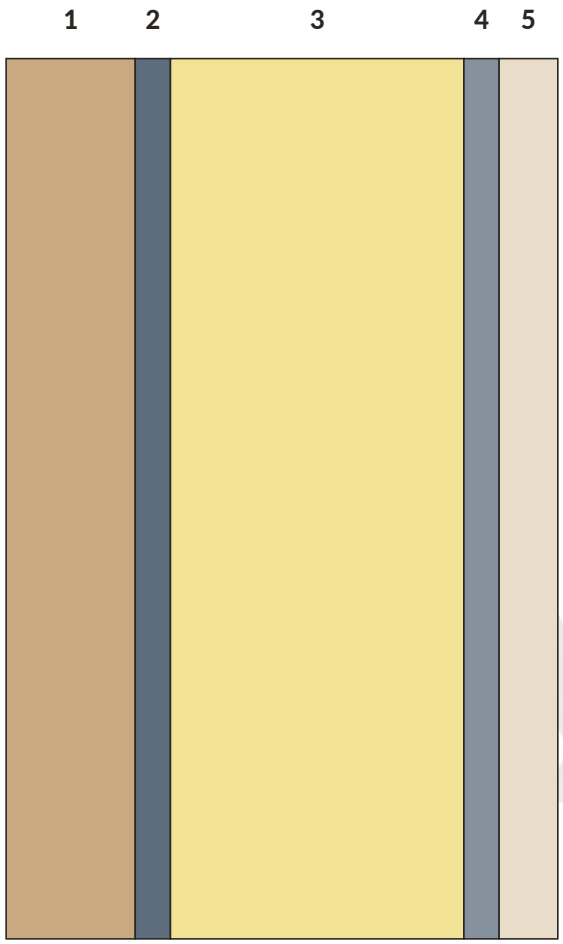


**1.** Exterior wooden boards, 44 mm

**2.** Humidity barrier (outside): keeps the insulation dry


**3.** Insulation

**4.** Humidity barrier (inside): stops vapour reaching the insulation

**5.** Interior wooden panelling, 20 mm

The outside humidity barrier is not needed on every model. Insulation is an option, fitted at the factory and recommended for pre-assembled saunas; there is one option for 2–3 m and one for 4–5 m saunas. The exact material and thickness are confirmed in the order.

# WINDOWS

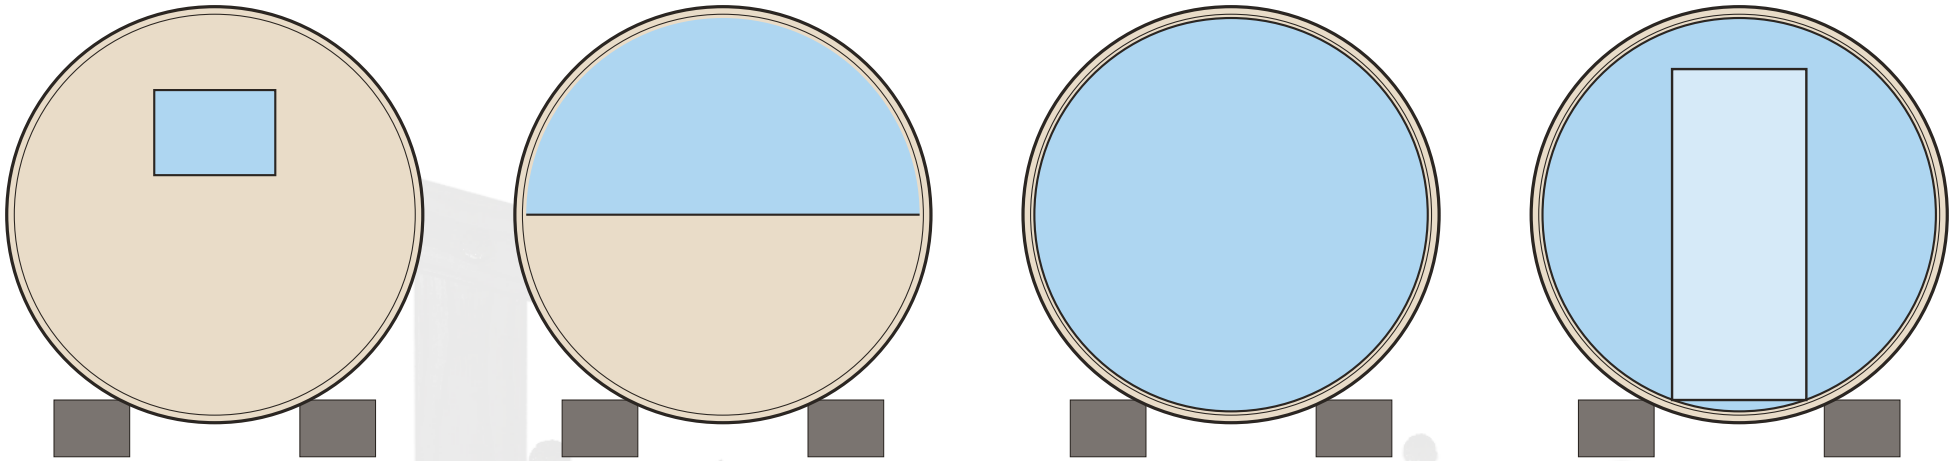

**Standard window** | **Panorama 50 %** | **Panorama 100 %** | **Full glass entrance wall**

| | |
|---|---|
| **Standard window** | One window in the rear wall, about 640 mm wide × 450 mm high |
| **Panorama 50 %** | Glass area about 2,160 mm wide × 1,080 mm high |
| **Panorama 100 %** | The whole rear wall, about 2,160 mm diameter |
| **Full glass entrance wall** | Replaces the wooden entrance wall and door: glass wall with glass door; combines with any rear window |

Choose one window option. Wooden edges may be added for decoration or structure. Schematic drawing, not to scale. Dimensions in mm, approximate; the approved order drawing applies.

# ROOF COLOURS AND ACCESSORIES



**Black** **Brown** **Green**


Bitumen shingles on the roof; one colour per sauna.

| Accessories (optional) |
|---|
| Stainless steel water tank for wood-burning heaters (steam effect) |
| Electric installation: LED lights under the benches |
| 2 Harvia lamps above the entrance door |
| Wooden fence in front of the heater |

# MOBILE VERSION – NORDIC NOMAD

**The TimberIN Nordic Nomad™ is the mobile version of the TimberIN Nordic Barrel™ Classic: the same sauna, built to travel on its own road trailer.**

| | |
|---|---|
| **Lengths** | 2, 3, 4 and 5 m (nominal total length), spruce or Thermowood |
| **As the Nordic Barrel™ Classic** | Harvia heaters, insulation, windows and layouts: see the pages before |
| **Not offered** | The full glass entrance wall |
| **Dimensions** | The external measurements are slightly reduced so that the sauna fits on the trailer and in the delivery truck; the final dimensions are those on your order drawing |
| **Trailer** | Optional braked two-axle trailer (EU category O2), matched to the sauna length; the 2 m sauna uses the 3 m trailer. Data on the next page |
| **Delivery** | Factory-assembled only. With the trailer, the sauna arrives mounted on it; the trailer wheels are removed for transport, and a crane or forklift is needed on site |

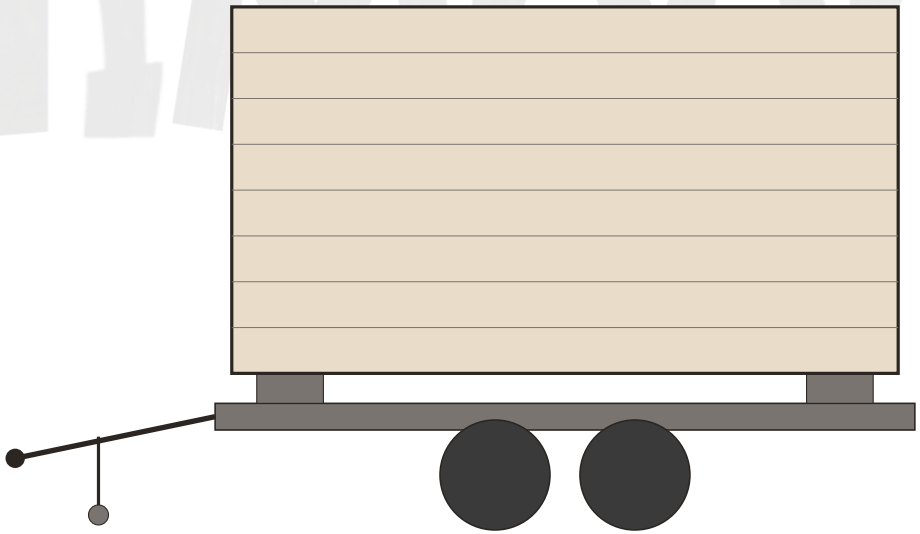

Schematic drawing, not to scale. Dimensions in mm, approximate; the approved order drawing applies.

# TRAILER (MOBILE VERSION)

Every TimberIN mobile sauna can be ordered on its own road trailer, built for transporting a sauna. The trailer length is matched to the selected sauna length.

| | |
|---|---|
| **Type** | Twin-axle centre-axle platform trailer with floor, braked, for transporting a sauna |
| **EU vehicle category** | O2 |
| **Axles** | 2 braked axles |
| **Tyres** | 4 × 185R14C 104N M+S |
| **Rims** | 5.5J × 14 H2, ET30, 5 × 112 |
| **Wheel position** | Outside the platform |
| **Coupling** | Overrun coupling; coupling height 430 mm above the road (fixed) |
| **Lighting** | 12 V, 13-pin plug |
| **Jockey wheel** | 60 mm |
| **Corner support legs** | 4 |
| **Wheel chocks** | 2 |
| **Platform width** | 1.5 m or 2.0 m; 2.07 m optional |
| **Platform length** | Matched to the selected sauna length |
| **Example: 5.0 × 2.0 m platform** | Overall length 6,501 mm incl. drawbar; platform width 2,000 mm |
| **Example: 4.0 m loading length** | Overall length 5,520 mm; overall width 1,960 mm; height 760 mm (unladen) |
| **Type approval and documents** | EU type-approved (Directive 2007/46/EC). Supplied with a Certificate of Conformity (CoC) and an identity-data certificate for registration; it can be permanently registered in EU member states. |

**Delivery and unloading.** When ordered with the trailer, the sauna is delivered already mounted on it. Because of the truck's height limit, the trailer wheels are removed for transport. Lifting equipment, either a crane or a forklift, must be available on site to lift the sauna off the truck, refit the wheels and set the trailer down on the ground.